



# SSR150C-8 SINGLE DRUM ROLLER



## Extended life time

- ◆ The use of water wheel type lubrication on the vibratory bearing extends the bearing life up to 5,000 hours.
- ◆ Double filtration of engine high intake air, the hydraulic system contains three stage filtration.

## High efficiency

- ◆ 10% greater excitation force than other products in the same category resulting in 16.7% greater production.

## Operator comfort

- ◆ Cab mounted on vibration damping mounts
- ◆ Cab temperature control
- ◆ Operator control forces have been reduced

## Safety features

- ◆ Rounded bumpers front and rear
- ◆ Large rear glass and sloped hood for greater visibility

## Technical specifications


Model	SSR150C-8	
<b>Weight and load</b>	Operating weight (kg)	15000
	Weight at drum (kg)	9600
	Weight at rear axle (kg)	5400
	Drum static linear load (N/cm)	442
<b>Compaction</b>	Vibration frequency (Hz)	32/36
	Nominal amplitude (mm)	1.8/0.9
	Centrifugal force (kN)	300/210
	Drum diameter (mm)	1500
	Drum width (mm)	2130
	Drum edge thickness (mm)	25
<b>Maneuver ability</b>	Travel speed (km/h)	0~4
		0~5
		0~5.8
		0~8.2
	Gradeability	45%
	Ground clearance (mm)	410
	Wheelbase (mm)	3143
	Steering angle (° )	± 35
	Swing angle (° )	± 12
	Min. turning outside diameter (mm)	12010
	Tires	23.1-26-12PR
<b>Engine</b>	Brand	DONGFENG CUMMINS
	Model	QSB4.5-C160-30
	Emission	/
	Rated power (kW)	119
<b>Capacity</b>	Battery (V × Ah)	24 × 120
	Fuel tank (L)	200
	Hydraulic oil tank (L)	120

## Standard configurations

Config.	Systems	Description	Qty	Details	Remarks
<b>Standard confi.</b>	Main machine	SSR150C-8 single drum roller, standard	1	1. Engine 2. Travel pump 3. Vibration pump 4. Travel motor 5. Vibration motor 6. Reduction gears 7. Operating platform 8. Vibratory drum (Smooth)	9. Electrical system 10. Operating system 11. Front frame 12. Rear frame 13. Covering part 14. Rear axle assembly 15. Center articulated frame 16. Cab+Air Con
				Shed	Shed
<b>Optional confi.</b>	Vibratory drum with welded pad foot	Drum with welded pad foot	1	Vibratory drum with welded pad foot, which cannot be removed, suitable for compaction of clay, semi-clay, rocks, gravels, expansive soil, and coal cinder base	Substitute smooth drums permissible
	Vibratory drum with assembled pad foot	Drum with assembled pad foot	1	Vibratory drum with assembled pad foot, which can be removed to form a smooth drum; suitable for compaction of clay, semi-clay, rocks, gravels, expansive soil, and coal cinder base	Optional

## Dimensions

Size code	SSR150C-10
A(mm)	3143
W(mm)	2318
L(mm)	6173
D(mm)	1500
H(mm)	3227
B(mm)	2130
K(mm)	410

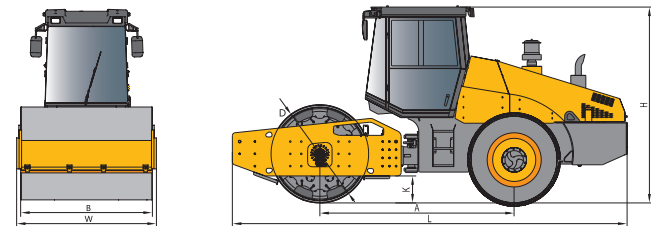

### SANY HEAVY INDUSTRY CO. LTD.

SANY Industrial Park, Economic and Technological Development Zone, Changsha, Hunan, China, 410100  
 Sales Hotline: 0086-731-85835199  
 Service Hotline: 0086-4006098318  
 Mail: sales@sanyglobal.com  
 Mail: CRD@sany.com.cn

The product configuration (including technical parameters) is subject to change and the delivered actual machine without notice.

[www.sanyglobal.com](http://www.sanyglobal.com)