



SSR260AC-8H SINGLE DRUM ROLLER

Extended life time

- ◆ The use of water wheel type lubrication on the vibratory bearing extends the bearing life up to 5,000 hours.
- ◆ Double filtration of engine high intake air, the hydraulic system contains three stage filtration.

High efficiency

- ◆ 10% greater excitation force than other products in the same category resulting in 16.7% greater production.

Operator comfort

- ◆ Cab mounted on vibration damping mounts
- ◆ Cab temperature control
- ◆ Operator control forces have been reduced

Safety features

- ◆ Rounded bumpers front and rear
- ◆ Large rear glass and sloped hood for greater visibility

Technical specifications


Model	SSR260AC-8H	
Weight and load	Operating weight (kg)	26000
	Weight at drum (kg)	13000
	Weight at rear axle (kg)	13000
	Drum static linear load (N/cm)	610
Compaction	Vibration frequency (Hz)	27/32
	Nominal amplitude (mm)	2.1/1.1
	Centrifugal force (kN)	416/295
	Drum diameter (mm)	1700
	Drum width (mm)	2170
	Drum edge thickness (mm)	40
Maneuver ability	Travel speed (km/h)	0~4.5
		0~5
		0~5.5
		0~8
	Gradeability	30%
	Ground clearance (mm)	440
	Wheelbase (mm)	3300
	Steering angle (°)	±35
	Swing angle (°)	±12
	Min. turning outside diameter (mm)	12672
	Tires	23.50-25-16PR
Engine	Brand	Weichai
	Model	WP6G200E331
	Emission	China III
	Rated power (kW)	147
Capacity	Battery (V × Ah)	24 × 120
	Fuel tank (L)	300
	Hydraulic oil tank (L)	100

Standard configurations

Config.	Systems	Description	Qty	Details		Remarks
Standard confi.	Main machine	SSR260AC-8H single drum roller, standard	1	1. Engine	9. Operating system	
				2. Travel pump	10. Front frame	
Optional confi.	Shed	Shed	1	Low cost		Optional
	Vibratory drum with welded pad foot	Drum with welded pad foot	1	Vibratory drum with welded pad foot, which cannot be removed, suitable for compaction of clay, semi-clay, rocks, gravels, expansive soil, and coal cinder base		Substitute smooth drums permissible
	Vibratory drum with assembled pad foot	Drum with assembled pad foot	1	Vibratory drum with assembled pad foot, which can be removed to form a smooth drum; suitable for compaction of clay, semi-clay, rocks, gravels, expansive soil, and coal cinder base		Optional

Dimensions

Size code	SSR220AC-8H
A(mm)	3300
W(mm)	2380
L(mm)	6825
D(mm)	1700
H(mm)	3370
B(mm)	2170
K(mm)	440

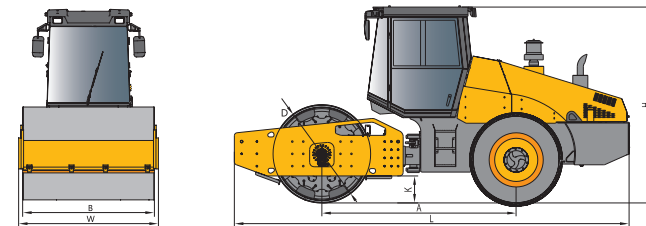

SANY HEAVY INDUSTRY CO. LTD.

SANY Industrial Park, Economic and Technological Development Zone, Changsha, Hunan, China, 410100
 Sales Hotline: 0086-731-85835199
 Mail: sales@sanyglobal.com

Service Hotline: 4006098318
 Tel: 0086-4006098318
 Mail: CRD@sany.com.cn

The product configuration (including technical parameters) is subject to change and the delivered actual machine without notice.

www.sanyglobal.com