



SSR260C-8 SINGLE DRUM ROLLER



Extended life time

- ◆ The use of water wheel type lubrication on the vibratory bearing extends the bearing life up to 5,000 hours.
- ◆ Double filtration of engine high intake air, the hydraulic system contains three stage filtration.

High efficiency

- ◆ 10% greater excitation force than other products in the same category resulting in 16.7% greater production.

Operator comfort

- ◆ Cab mounted on vibration damping mounts
- ◆ Cab temperature control
- ◆ Operator control forces have been reduced

Safety features

- ◆ Rounded bumpers front and rear
- ◆ Large rear glass and sloped hood for greater visibility

Technical specifications


Model	SSR260C-8	
Weight and load	Operating weight (kg)	26000
	Weight at drum (kg)	17000
	Weight at rear axle (kg)	9000
	Drum static linear load (N/cm)	788
Compaction	Vibration frequency (Hz)	28/32
	Nominal amplitude (mm)	2.05/1.03
	Centrifugal force (kN)	420/310
	Drum diameter (mm)	1700
	Drum width (mm)	2170
	Drum edge thickness (mm)	40
Maneuver ability	Travel speed (km/h)	0~4
		0~6
		0~6.5
		0~10
	Gradeability	40% / 50%
	Ground clearance (mm)	430
	Wheelbase (mm)	3471
	Steering angle (°)	± 35
	Swing angle (°)	± 12
	Min. turning outside diameter (mm)	12800
	Tires	23.50-25-16PR
Engine	Brand	SANY
	Model	D07S3-245E0
	Emission	China III
	Rated power (kW)	180
Capacity	Battery (V × Ah)	24 × 120
	Fuel tank (L)	300
	Hydraulic oil tank (L)	150

Standard configurations

Config.	Systems	Description	Qty	Details	Remarks
Standard confi.	Main machine	SSR260C-8 single drum roller, standard	1	1. Engine 2. Travel pump 3. Vibration pump 4. Travel motor 5. Vibration motor 6. Reduction gears 7. Operating platform 8. Vibratory drum (Smooth)	9. Electrical system 10. Operating system 11. Front frame 12. Rear frame 13. Covering part 14. Rear axle assembly 15. Center articulated frame 16. Cab+Air Con
				Shed	Shed
Optional confi.	Vibratory drum with welded pad foot	Drum with welded pad foot	1	Vibratory drum with welded pad foot, which cannot be removed, suitable for compaction of clay, semi-clay, rocks, gravels, expansive soil, and coal cinder base	Substitute smooth drums permissible
	Vibratory drum with assembled pad foot	Drum with assembled pad foot	1	Vibratory drum with assembled pad foot, which can be removed to form a smooth drum; suitable for compaction of clay, semi-clay, rocks, gravels, expansive soil, and coal cinder base	Optional

Dimensions

Size code	SSR260C-8
A(mm)	3471
W(mm)	2450
L(mm)	7060
D(mm)	1700
H(mm)	3330
B(mm)	2170
K(mm)	430

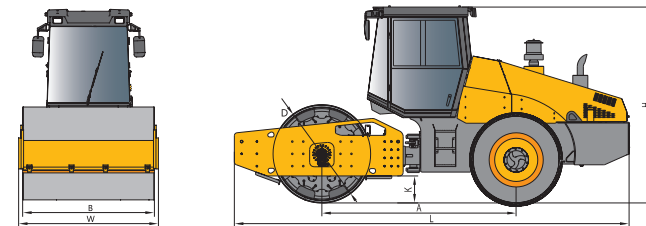

SANY HEAVY INDUSTRY CO. LTD.

SANY Industrial Park, Economic and Technological Development Zone, Changsha, Hunan, China, 410100
 Sales Hotline: 0086-731-85835199
 Service Hotline: 0086-4006098318
 Mail: sales@sanyglobal.com
 Mail: CRD@sany.com.cn

The product configuration (including technical parameters) is subject to change and the delivered actual machine without notice.

www.sanyglobal.com