

HBT6013C-5 TRAILER PUMP



ADVANCED HYDRAULIC SYSTEM

Differential pressure controlled, bi-directional hydraulic system
High flow, high efficiency valve system
Automatically retracted pistons

EFFICIENT PUMPING SYSTEM

High-efficiency pump technology
High power mixing motor
Large bore reversing cylinder
New-type hopper

INTELLIGENT CONTROL SYSTEM

Fault self-diagnosis technology
Dedicated motion controller
Emergency override available

WEAR-RESISTING TECHNOLOGY

G5 improved wearing part adopt Sino-Germany high-tech materials and advanced technology to greatly improve the product performance .

Quality Changes the World

www.sanyglobal.com

SANY HEAVY INDUSTRY CO., LTD.

SANY Industry Town, Changsha Economic and Technological Development Zone,
Hunan Province, China


Tel: 0086-731-85835199 / 0086-4006098318

E-mail: sales@sanyglobal.com / CRD@sany.com.cn

TECHNICAL PARAMETER

技术参数

Model		HBT6013C-5
混凝土最大理论输送压力 Max. Delivery Pressure (theoretical)(Mpa)	低压 Low Pressure	8
	高压 High Pressure	13
混凝土最大理论输送量 Max. Concrete Output (theoretical)(m ³ /h)	低压 Low Pressure	65
	高压 High Pressure	40
发动机 / 电动机额定功率 Motor Rated Power (kW/rpm)		90/1480
输送缸直径 × 最大行程 Delivery Cylinder Bore (mm) × Strok (mm)		Φ200 × 1400
料斗容积 × 上料高度 Hopper Capacity (m ³) × Feeding Height (mm)		0.7 × 1320
外形尺寸 (长 × 宽 × 高) Dimension (L × W × H) (mm)		6185 × 2100 × 2200
总质量 Gross Weight (kg)		5790
最大骨料尺寸 Max. Aggregate Size (mm)	输送管径 Delivery Pipe	Φ150 mm
		Φ120 mm
类型 Type		S 阀 S-Valve
砼塌落度 Slump of Concrete (mm)		100-230

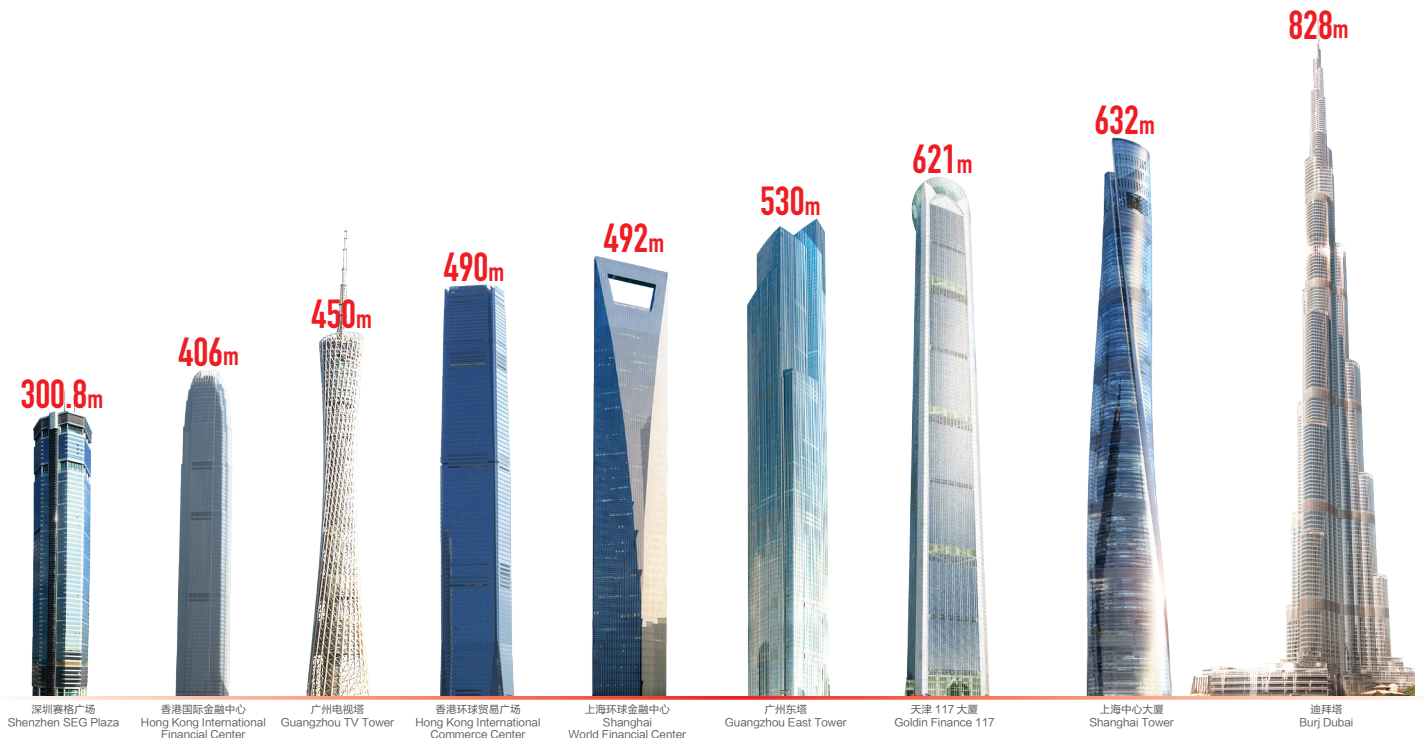

CHALLENGE THE HEIGHT OF SKY

© 2024 SANY HEAVY INDUSTRY Co., Ltd. All Rights Reserved.

Due to technological improvement, technical specifications may change without prior notification.

Machines in pictures may include attachments. All rights are retained by Sany Heavy Industry.

No content of this catalogue may be copied for any purpose without the prior written permission from Sany Heavy Industry.

SANY[®]
QUALITY CHANGES THE WORLD.