



SSP130C-10 PAVER



Powerful

- ◆ The power can satisfy the paver's demands under different working conditions;
- ◆ Low noise, less oil consumption and better machine reliability

Efficiency

- ◆ Paving capability of over 900 tons per hour.
- ◆ Capable of paving a mat up to 50 cm thick
- ◆ 2 people can finish assembling 9.5m bolt-on screed in 2 hours.

Economical

- ◆ Conveyor is made of thickened, wear resistant steel plate with a service life in excess of 2000 hours.
- ◆ Designed to endure non-stop paving operations in 50 degree Celsius temperatures.

Technical specifications


Model	SSP130C-10
Paving capacity (t/h)	1300
Paving width (m)	Bolted & extension: 13.5 (extension: 1.25 × 2)
Basic width (m)	Bolted: 3
Max. Paving thickness (mm)	550
Working speed (m/min)	1~20
Travel speed (km/h)	0~3.2
Transport size (mm)	Bolted: 6950 × 3060 × 3280
Engine brand	DONGFENG CUMMINS
Engine model	QSL8.9-C325-33
Rated power of engine (kW)	242
Emission standard	CHINA III
Voltage of electric system (V)	24
Gradeability	≥ 20%
Frequency of oscillation (Hz)	0~50
Hopper capacity (m ³)	9
Heating mode	Electric heated
Camber adjustment range (%)	-1~3
Tamps	2
Amplitude of tamp (mm)	Main vibrating: 3/5/8/10 Auxiliary vibrating: 5
Frequency of tamp (Hz)	0~25

Key parts configuration

Model	SSP130C-10
Sreed	SANY SSA13530 screed
Levelling system	MOBA (control+sensor)
Length of screed(m)	The width is in steps of 0.25m and can be changed in steps

Dimensions

Size code	SSP130C-10
A (mm)	3889
B (mm)	3280
C (mm)	3409
D (°)	14
E (°)	12.5
F (mm)	3000
G (mm)	2222
I (mm)	3704
L (mm)	6950

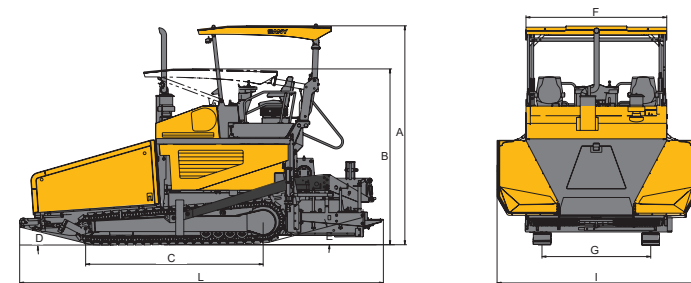

SANY HEAVY INDUSTRY CO. LTD.

SANY Industrial Park, Economic and Technological Development Zone, Changsha, Hunan, China, 410100
 Sales Hotline: 0086-731-85835199
 Service Hotline: 0086-4006098318
 Mail: sales@sanyglobal.com
 Mail: CRD@sany.com.cn

The product configuration (including technical parameters) is subject to change and the delivered actual machine without notice.

www.sanyglobal.com