



SSP100C-8 PAVER



Powerful

- ◆ The power can satisfy the paver's demands under different working conditions;
- ◆ Low noise, less oil consumption and better machine reliability

Efficiency

- ◆ Paving capability of over 900 tons per hour.
- ◆ Capable of paving a mat up to 50 cm thick
- ◆ 2 people can finish assembling 9.5m bolt-on screed in 2 hours.

Economical

- ◆ Conveyor is made of thickened, wear resistant steel plate with a service life in excess of 2000 hours.
- ◆ Designed to endure non-stop paving operations in 50 degree Celsius temperatures.

Technical specifications


Model	SSP100C-8
Paving capacity (t/h)	900
Paving width (m)	Bolted: 10
Basic width (m)	Bolted: 2.5
Max. Paving thickness (mm)	500
Working speed (m/min)	1~16
Travel speed (km/h)	0~2.4
Transport size (mm)	Bolted: 6790 × 2960 × 3280
Engine brand	SANY
Engine model	D07S3-245E0
Rated power of engine (kW)	180
Emission standard	CHINA III
Voltage of electric system (V)	24
Gradeability	≥ 20%
Frequency of oscillation (Hz)	/
Hopper capacity (m ³)	8.5
Heating mode	Gas heated
Camber adjustment range (%)	-1~3
Tamps	2
Amplitude of tamp (mm)	Main vibrating: 3/5/8/10 Auxiliary vibrating: 5
Frequency of tamp (Hz)	0~25

Key parts configuration

Model	SSP100C-8
Sreed	SANY SA25/100 screed
Levelling system	MOBA (control+sensor)
Length of screed(m)	2.5 / 6 / 7.5 / 10

Dimensions

Size code	SSP100C-8
A (mm)	4022
B (mm)	3280
C (mm)	3278
D (°)	14
E (°)	12.5
F (mm)	2600
G (mm)	2040
I (mm)	3660
L (mm)	6790

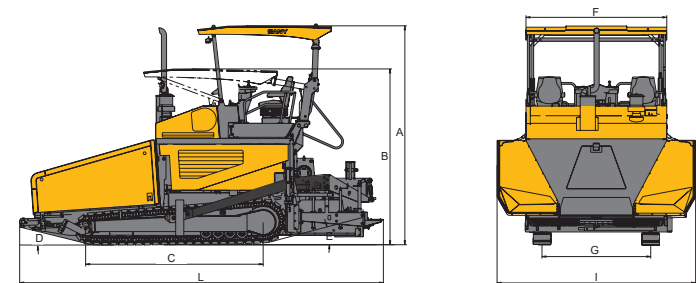

SANY HEAVY INDUSTRY CO., LTD.

SANY Industrial Park, Economic and Technological Development Zone, Changsha, Hunan, China, 410100
 Sales Hotline
 Tel: 0086-731-85835199
 Mail: sales@sanyglobal.com

Service Hotline
 Tel: 0086-4006098318
 Mail: CRD@sany.com.cn

The product configuration (including technical parameters) is subject to change and the delivered actual machine without notice.

www.sanyglobal.com