



# SSP90C-8 PAVER



## Powerful

- ◆ The power can satisfy the paver's demands under different working conditions;
- ◆ Low noise, less oil consumption and better machine reliability

## Efficiency

- ◆ Paving capability of over 900 tons per hour.
- ◆ Capable of paving a mat up to 50 cm thick
- ◆ 2 people can finish assembling 9.5m bolt-on screed in 2 hours.

## Economical

- ◆ Conveyor is made of thickened, wear resistant steel plate with a service life in excess of 2000 hours.
- ◆ Designed to endure non-stop paving operations in 50 degree Celsius temperatures.

## Technical specifications


| Model                             | SSP90C-8                         |
|-----------------------------------|----------------------------------|
| Paving capacity (t/h)             | 900                              |
| Paving width (m)                  | Hydraulic: 9.2                   |
| Basic width (m)                   | Hydraulic: 3~5.7                 |
| Max. Paving thickness (mm)        | 500                              |
| Working speed (m/min)             | 1~16                             |
| Travel speed (km/h)               | 0~2.4                            |
| Transport size (mm)               | Hydraulic:<br>7250 × 3030 × 3280 |
| Engine brand                      | SANY                             |
| Engine model                      | D07S3-245E0                      |
| Rated power of engine (kW)        | 180                              |
| Emission standard                 | CHINA III                        |
| Voltage of electric system (V)    | 24                               |
| Gradeability                      | ≥ 20%                            |
| Frequency of oscillation (Hz)     | 0~50                             |
| Hopper capacity (m <sup>3</sup> ) | 8.5                              |
| Heating mode                      | Electric heated                  |
| Camber adjustment range (%)       | -1~3                             |
| Tamps                             | 1                                |
| Amplitude of tamp (mm)            | 0/2/4/6/8                        |
| Frequency of tamp (Hz)            | 0~25                             |

## Key parts configuration

| Model               | SSP90C-8              |
|---------------------|-----------------------|
| Sreed               | SANY SE570 screed     |
| Levelling system    | MOBA (control+sensor) |
| Length of screed(m) | 5.7 / 6.2 / 7.7 / 9.2 |

## Dimensions

| Size code | SSP90C-8 |
|-----------|----------|
| A (mm)    | 4022     |
| B (mm)    | 3280     |
| C (mm)    | 3278     |
| D (° )    | 14       |
| E (° )    | 12.5     |
| F (mm)    | 2600     |
| G (mm)    | 2040     |
| I (mm)    | 3660     |
| L (mm)    | 7250     |

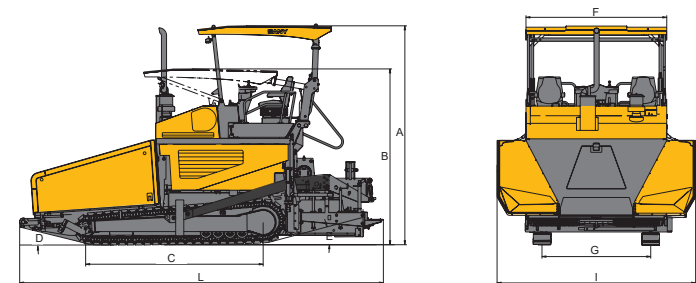

### SANY HEAVY INDUSTRY CO., LTD.

SANY Industrial Park, Economic and Technological Development Zone, Changsha, Hunan, China, 410100  
 Sales Hotline  
 Tel: 0086-731-85835199  
 Mail: sales@sanyglobal.com

Service Hotline  
 Tel: 0086-4006098318  
 Mail: CRD@sany.com.cn

The product configuration (including technical parameters) is subject to change and the delivered actual machine without notice.

[www.sanyglobal.com](http://www.sanyglobal.com)