

SANY[®]

HBT6006A-5 TRAILER PUMP

HBT6006A-5 拖泵

Advanced Hydraulic System

Differential pressure controlled, bi-directional hydraulic system.
High flow, high efficiency valve system
Automatically retracted pistons

Advanced Energy-saving Technology

New generation energy saving technology automatically adjusts engine power output to match the load results in fuel savings of up to 25%.

Wear-resisting Technology

G5 improved wearing part Adopt Sino-Germany high-tech materials and advanced technology to greatly improve the product performance

Intelligent Control System

Fault self-diagnosis technology
Dedicated motion controller
Emergency Override Available

Efficient Pumping System


High-efficiency pump technology
High power mixing motor
Large bore reversing cylinder
New-type hopper



TECHNICAL PARAMETER

技术参数

型号 Model		HBT6006A-5	
生产 Place of Production		中国 China	
混凝土最大理论输送压力 Max. Delivery Pressure (theoretical)(Mpa)	低压 Low Pressure	7	
	高压 High Pressure	/	
混凝土最大理论输送量 Max. Concrete Output (theoretical)(m ³ /h)	低压 Low Pressure	70	
	高压 High Pressure	/	
发动机 / 电动机额定功率 Motor Rated Power (kW/rpm)		75/1480	
输送缸直径 × 最大行程 Delivery Cylinder Bore (mm) × Stroke (mm)		Φ200×1400	
料斗容积 × 上料高度 Hopper Capacity (m ³) × Feeding Height (mm)		0.6×1415	
外形尺寸 (长 × 宽 × 高) Dimension (L*W*H) (mm)		6590×2100×2200	
总质量 Gross Weight (kg)		5880	
最大骨料尺寸 Max. Aggregate Size (mm)	输送管径 Delivery Pipe	Φ150 mm	50
		Φ120 mm	40
类型 Type		闸板阀 Gate Valve	
砼塌落度 Slump of Concrete (mm)		100~230	

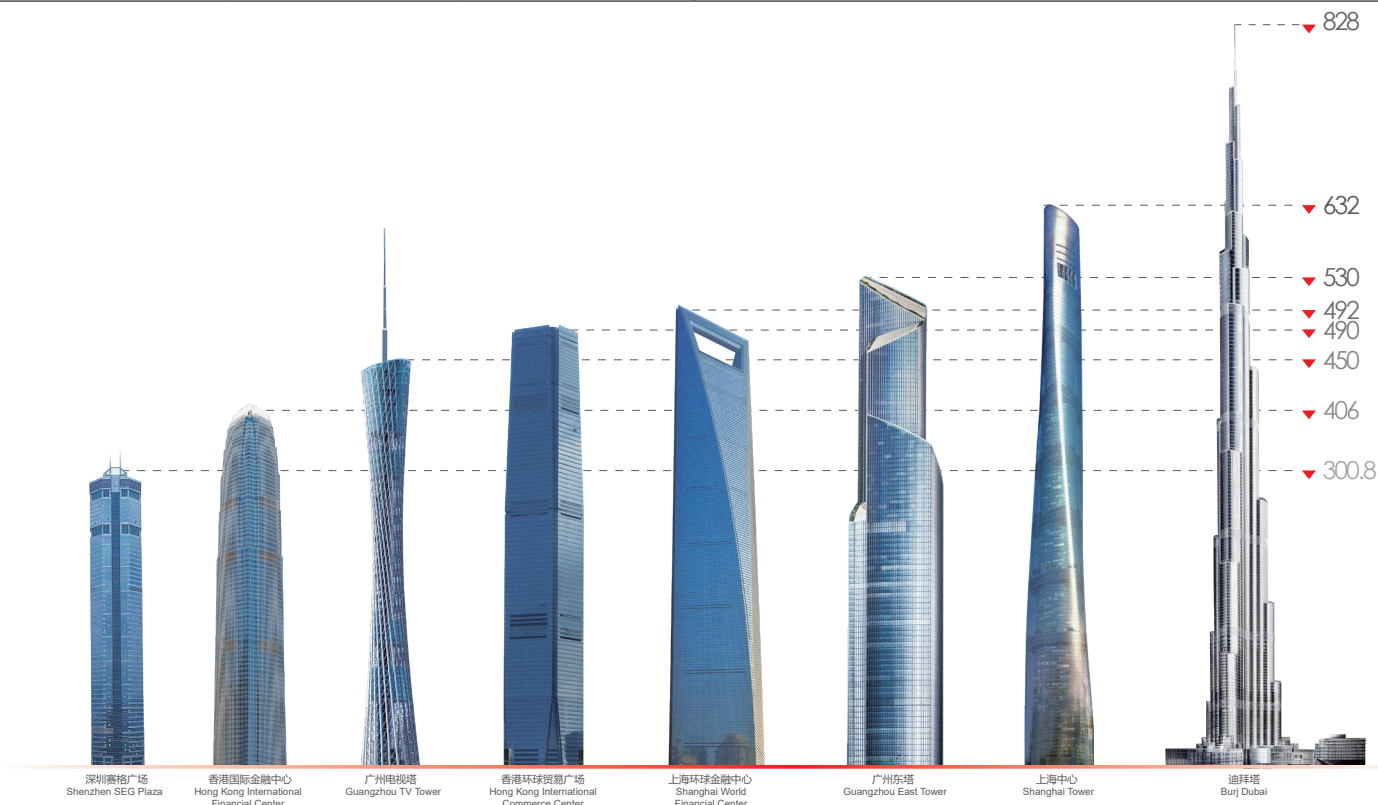

CHALLENGE THE HEIGHT OF SKY

SANY HEAVY INDUSTRY CO., LTD.

SANY Industry Town, Changsha Economic and Technological Development Zone,
Hunan Province, China
Service Line: +86 4006 098 318 E-mail: crd@sany.com.cn

SANY[®]
QUALITY CHANGES THE WORLD.