

SANY[®]

HBT4010C-5I TRAILER PUMP

HBT4010C-5I 拖泵

Advanced Hydraulic System

Differential pressure controlled, bi-directional hydraulic system.
High flow, high efficiency valve system
Automatically retracted pistons

Intelligent Control System

Fault self-diagnosis technology
Dedicated motion controller
Emergency Override Available

Advanced Energy-saving Technology

New generation energy saving technology automatically adjusts engine power output to match the load results in fuel savings of up to 25%.

Efficient Pumping System

High-efficiency pump technology
High power mixing motor
Large bore reversing cylinder
New-type hopper

Wear-resisting Technology


G5 improved wearing part Adopt Sino-Germany high-tech materials and advanced technology to greatly improve the product performance



TECHNICAL PARAMETER

技术参数

型号 Model			HBT4010C-5I
生产地 Place of Production			印度 India
混凝土最大理论输送压力 Max. Delivery Pressure (theoretical)(Mpa)	低压 Low Pressure		6
	高压 High Pressure		10
混凝土最大理论输送量 Max. Concrete Output (theoretical)(m³/h)	低压 Low Pressure		42
	高压 High Pressure		28
发动机 / 电动机额定功率 Motor Rated Power (kW/rpm)			49/2100
输送缸直径 × 最大行程 Delivery Cylinder Bore (mm) × Strok (mm)			Φ180×1400
料斗容积 × 上料高度 Hopper Capacity (m³) × Feeding Height (mm)			0.6×1240
外形尺寸 （长 × 宽 × 高） Dimension (L*W*H) (mm)			5600×2050×2050
总质量 Gross Weight (kg)			4600
最大骨料尺寸 Max. Aggregate Size (mm)	输送管径 Delivery Pipe	Φ150 mm	50
		Φ120 mm	40
类型 Type			S 阀 S-Valve
砼塌落度 Slump of Concrete (mm)			100~230

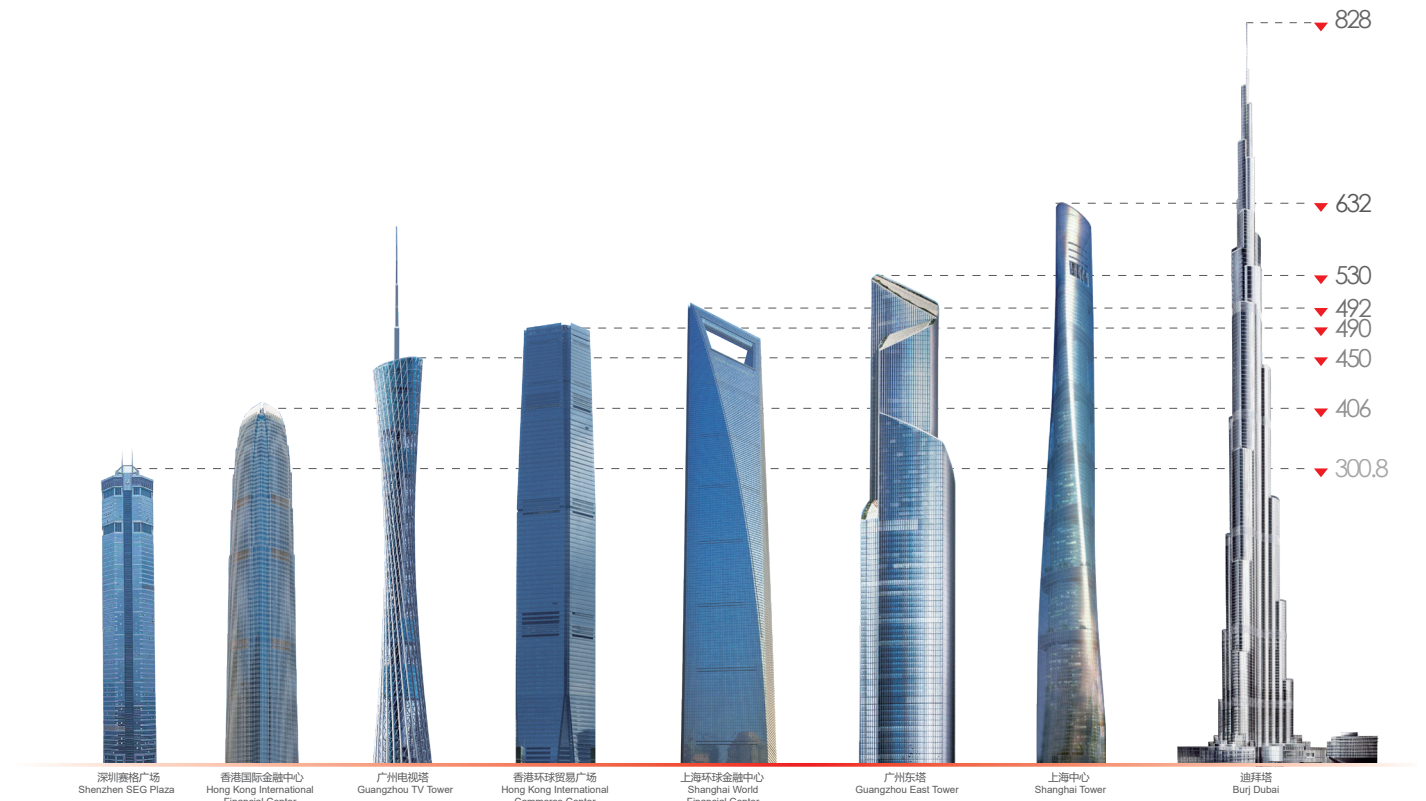

CHALLENGE THE HEIGHT OF SKY

SANY HEAVY INDUSTRY CO., LTD.

SANY Industry Town, Changsha Economic and Technological Development Zone,
Hunan Province, China

Service Line: +86 4006 098 318 E-mail: crd@sany.com.cn

SANY®
QUALITY CHANGES THE WORLD.