

SANY[®]

HBT5010C-5I TRAILER PUMP

HBT5010C-5I 拖泵

Advanced Hydraulic System

Differential pressure controlled, bi-directional hydraulic system.
High flow, high efficiency valve system
Automatically retracted pistons

Advanced Energy-saving Technology

New generation energy saving technology automatically adjusts engine power output to match the load results in fuel savings of up to 25%.

Wear-resisting Technology

G5 improved wearing part Adopt Sino-Germany high-tech materials and advanced technology to greatly improve the product performance

Intelligent Control System

Fault self-diagnosis technology
Dedicated motion controller
Emergency Override Available

Efficient Pumping System


High-efficiency pump technology
High power mixing motor
Large bore reversing cylinder
New-type hopper



TECHNICAL PARAMETER

技术参数

型号 Model		HBT5010C-5I	
生产地 Place of Production		印度 India	
混凝土最大理论输送压力 Max. Delivery Pressure (theoretical)(Mpa)	低压 Low Pressure	6	
	高压 High Pressure	10	
混凝土最大理论输送量 Max. Concrete Output (theoretical)(m ³ /h)	低压 Low Pressure	59	
	高压 High Pressure	39	
发动机 / 电动机额定功率 Motor Rated Power (kW/rpm)		73.6/2300	
输送缸直径 × 最大行程 Delivery Cylinder Bore (mm) × Strok (mm)		Φ180×1400	
料斗容积 × 上料高度 Hopper Capacity (m ³) × Feeding Height (mm)		0.6×1240	
外形尺寸 (长 × 宽 × 高) Dimension (L*W*H) (mm)		5600×2050×2050	
总质量 Gross Weight (kg)		4800	
最大骨料尺寸 Max. Aggregate Size (mm)	输送管径 Delivery Pipe	Φ150 mm	50
		Φ120 mm	40
类型 Type		S 阀 S-Valve	
砼塌落度 Slump of Concrete (mm)		100~230	

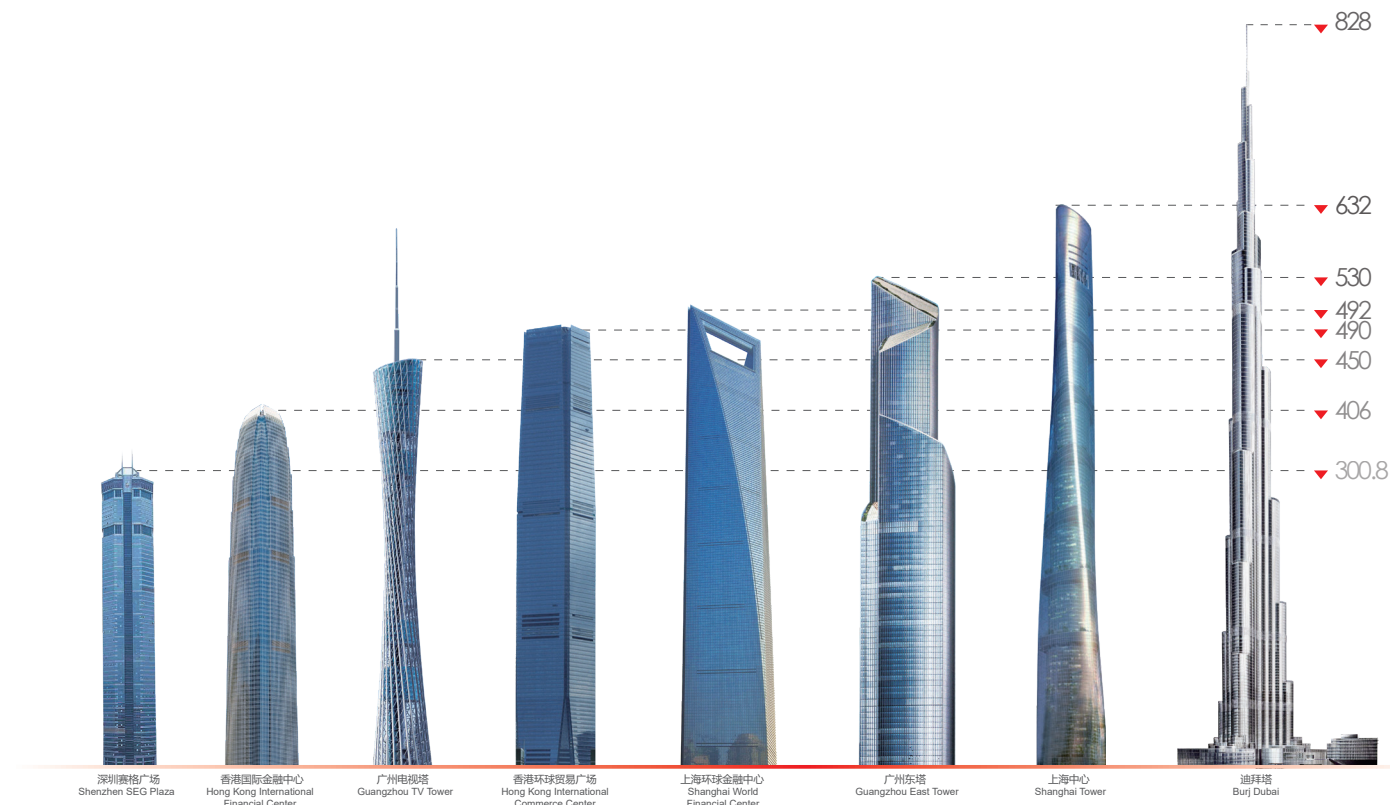

CHALLENGE THE HEIGHT OF SKY

SANY HEAVY INDUSTRY CO., LTD.

SANY Industry Town, Changsha Economic and Technological Development Zone,
Hunan Province, China

Service Line: +86 4006 098 318 E-mail: crd@sany.com.cn

SANY[®]
QUALITY CHANGES THE WORLD.