



SANY Robotics Technology Co., Ltd.
Make Material Handling More Efficient, Greener, and Smarter

SCP40C6

SANY High-voltage Lithium Battery-powered Counterbalanced Forklift



Choose SANY to Tackle Extreme
Working Conditions



Choose SANY to Embrace
Leading Intelligence



Choose SANY to Experience
International Quality

Main Features



Outstanding Performance

- Perfect integration of new energy vehicle technology with forklifts, fully replacing traditional fuel-powered options;
- Maximum protection with IP67 for core electrical components and IPX4 for the entire forklift;
- Industry-leading "Double 20" performance with a travel speed of 20km/h and a gradeability of 20%.



Safety and Reliability

- Active Safety System: Detect human movement and anticipate hazards with alerts (optional);
- High-precision Facial Recognition System: Prevent fatigue driving (optional).



Ultra-long Warranty Period

- Enjoy worry-free usage with an ultra-long warranty period of five years or 10,000 service hours for EIC.



Enhanced Efficiency

- Self-developed dual-core VCU offers powerful computing capabilities with millisecond response time for superior control
- Fast-charging and high-performance battery can go from 0% to 90% in just 1.5 hours;
- Permanent magnet synchronous electric drive delivers greater power and performance.



Energy Saving and Cost Reduction

- Every 2 SANY electric forklifts are equivalent to 3 fuel-powered forklifts in terms of economic benefits;
- Continuous operation with an 8-hour work cycle, providing 24/7 usage without downtime.




Cloud-Based Support

- Intelligent cloud monitoring allows for fleet management, remote fault diagnosis, etc.

Table of Parameters

Category	Unit	Parameters
Overview	Rated load capacity	Q(kg) 4000
	Load center distance	c(mm) 500
	Front overhang	x(mm) 515
	Wheel base	y(mm) 1850
Weight	Dead weight	kg 5855
	Axle load front/rear(full load)	kg 8675/1180
	Axle load front/rear(no load)	kg 2480/3375
Tire	Tire type	/ Solid tires
	Front tire specifications	/ 250-15
	Rear tire specifications	/ 21"8-9
	Front wheel track	b10(mm) 1050
	Rear wheel track	b11(mm) 1000
Performance	Max. travel speed(full load/no load)	km/h 20/20
	Max. lifting speed(full load/no load)	mm/s 380/410
	Lowering speed(full load/no load)	mm/s 430/340
	Traction force(full load/no load)	N 21000
	Gradeability(full load/no load)	% 20/20
	Service brake	/ Hydraulic
	Parking brake	/ Mechanical

Category	Unit	Parameters
Dimensions	Mast tilt angle (front/rear)	$\alpha/\beta(^{\circ})$ 6/10
	Height when mast is retracted	h1(mm) 2180
	Free lift height	h2(mm) 120
	Lifting height	h3(mm) 3000
	Max. height when mast is raised	h4(mm) 4150
	Height of overhead guard	h6(mm) 2210
	Overall length (to the front end face of forks)	L2(mm) 2860
	Overall width	b1(mm) 1310
	Fork dimensions (thickness/width/length)	s/e/l(mm) 50*122*1070
	Fork spacing	mm 247-1100
	Min. ground clearance at mast	m1(mm) 120
	Min. ground clearance at wheel base	m2(mm) 170
Motor battery	Stacking aisle (1m*1.2m)	Ast(mm) 4400
	Stacking aisle (0.8m*1.2m)	Ast(mm) 4200
	Min. turning radius	Wa(mm) 2450
	Travel motor (S2-60min)	kW 32
	Lifting motor (S3-15%)	kW 32
Controller	Battery voltage / capacity	V/kWh 288/47
	Battery weight	kg 325
	Travel control mode	- IGBT
	Pressure provided by attachment	Mpa 19.5

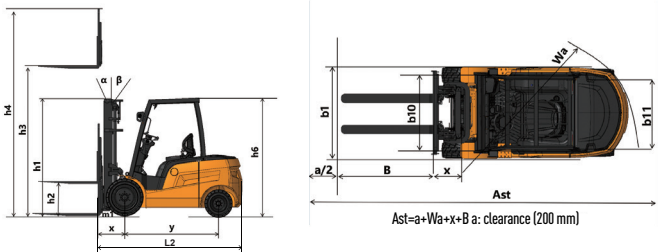

SANY Robotics Technology Co., Ltd.

Address: Building Z1, East Factory Area, SANY Industrial Park, Changsha County, Changsha City, Hunan Province, China

Hotline: +86-4008-100-318

E-mail: thesq2@sany.com.cn

Website: www.sanyroboticsglobal.com

© Printed in China, September 2025 Edition