

ST5519



Configurations

Item	Parameter
Engine	DEUTZ TD 2.9 55kw Kubota V3307 55kw
Gearbox	DANA-312
Axle	DANA 211
Tyre	12-16.5
Boom Frame	2 Sections Telescopic Boom
Steering Drive Model	4WD/3 Steering Models
Hydraulic Tank Capacity	70 L
Fuel Tank Capacity	80L




Dimension

Item	Unit	Parameter
Weight	kg	5000
L*W*H	mm	4000×1850×1920
Wheel Base	mm	2390
Minimum Turning Radius	m	3.33
Minimum Ground Clearance	m	0.25
Maximum Drive Speed	km/h	25
Maximum Traction	kN	25.5

Performance

Item	Unit	Parameter
Rated Capacity	kg	2500
Lift Capacity at Maximum Height	kg	2000
Lift Capacity at Maximum Reach	kg	800
Lifting Capacity	m	5.90
Maximum Forward Reach	m	3.4
Maximum Elevation Angle	°	69
Maximum Depression Angle	°	-1
Boom Raise/Lower Speed	s	9.4/6.7
Boom Extend/Retract Speed	s	9.6/6.0
Fork Arm Extend Speed	s	3.1
Fork Arm Retract Speed	s	4.0

STH5519

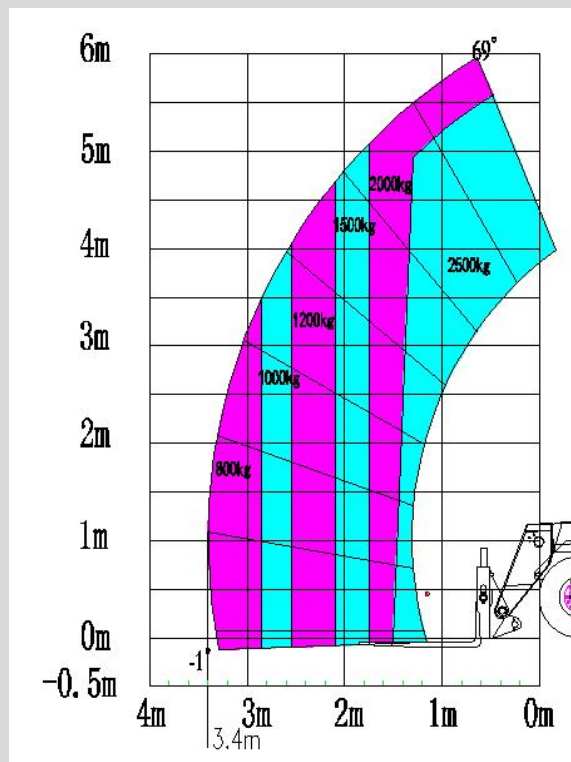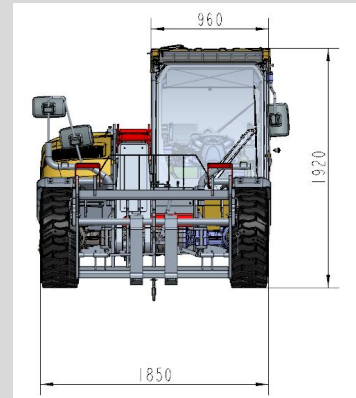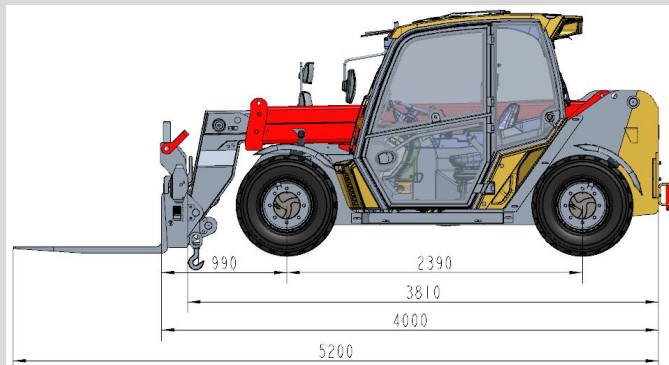

SANY MARINE

SANY Industrial Park, Gaolan Port Economic and Development Zone,
Zhuhai, Guangdong, China

Tel +86-756-7266963 Service +86-4008-87-8318

Materials and specifications are subject to change without prior notice. Featured machines in photos may include additional equipment.

© 2021 SANY. All Rights Reserved.