

SANY[®]

QUALITY CHANGES THE WORLD



100 t



50.5 m



68 m/77.5 m (Optional 选配)

STC1000T5

SANY Truck Crane

SANY CRANE

BETTER WORLD, BETTER SANY CRANE



SANY CRANE is one of the core business units in SANY Group, specializing in the development and manufacturing of high-end wheeled cranes, crawler cranes and tower cranes.

三一集团旗下核心事业部，从事高端轮式起重机、履带起重机、塔式起重机系列产品的研发制造。



CONTENTS

目录

Crane Overview	▶ 04
整机概述	
Highlights	▶ 05
整机亮点	
Overall Dimensions	▶ 08
整机尺寸	
Technical Specifications	▶ 09
整机参数	
Counterweight	▶ 11
配重	
Machine Introduction	▶ 12
整机介绍	
Working Conditions & Code Description	▶ 14
工况组合及工况代码说明	
T	14
TJ	27
TEJ	27
Icon Description	▶ 38
图标说明	
SANY Overseas Service	▶ 39
三一海外服务	

CRANE OVERVIEW

整机概述

The STC1000T5 is a four-axle truck crane with a maximum rated lifting capacity of 100t, a 5-section boom, and a maximum boom length of 50.5m. It features a true 3-meter chassis, Cummins Z10E385 engine, FAST transmission, HanDe heavy-duty axles, and 385/325 steel wire tires. It can carry a 25t counterweight for transfer. The crane is also equipped with brand-new cabs. With a maximum lifting moment of 3557 kN·m, the crane achieves a maximum lifting height of 68m with the jib.

一款最大额定起重量100吨、5节臂、最大臂长50.5米的4桥汽车起重机。

整车配置真3m底盘，东风康明斯Z10E385发动机+FAST变速器+汉德重载车桥+385/325钢丝胎，可带25.0t配重转场，配备全新两室。最大起重力矩3557kN·m，带副臂最高起升高度68m。

Truck Crane
STC1000T5 / 100t Lifting Capacity

HIGHLIGHTS

整机亮点

Load-Sensitive Adaptive System

工况自适应系统

Real-time adjustment of the slewing torque based on the crane's load condition, significantly reducing slewing oscillations.

依据整车吊载状态实时调整回转力矩，回转晃动量大幅减少。

Enhanced Corrosion Protection

强效防腐保护

Standard C4 coating with an optional C5 heavy-duty anti-corrosion coating, greatly extending the corrosion resistance lifespan.

标配C4涂装，可选C5重防腐涂装，极大地延长了防腐寿命。



Driver's cab
新两室-下车



Operator's cab
新两室-上车




Load-Sensitive
Adaptive System
工况自适应系统



Enhanced Corrosion
Protection
强效防腐保护

HIGHLIGHTS

整机亮点

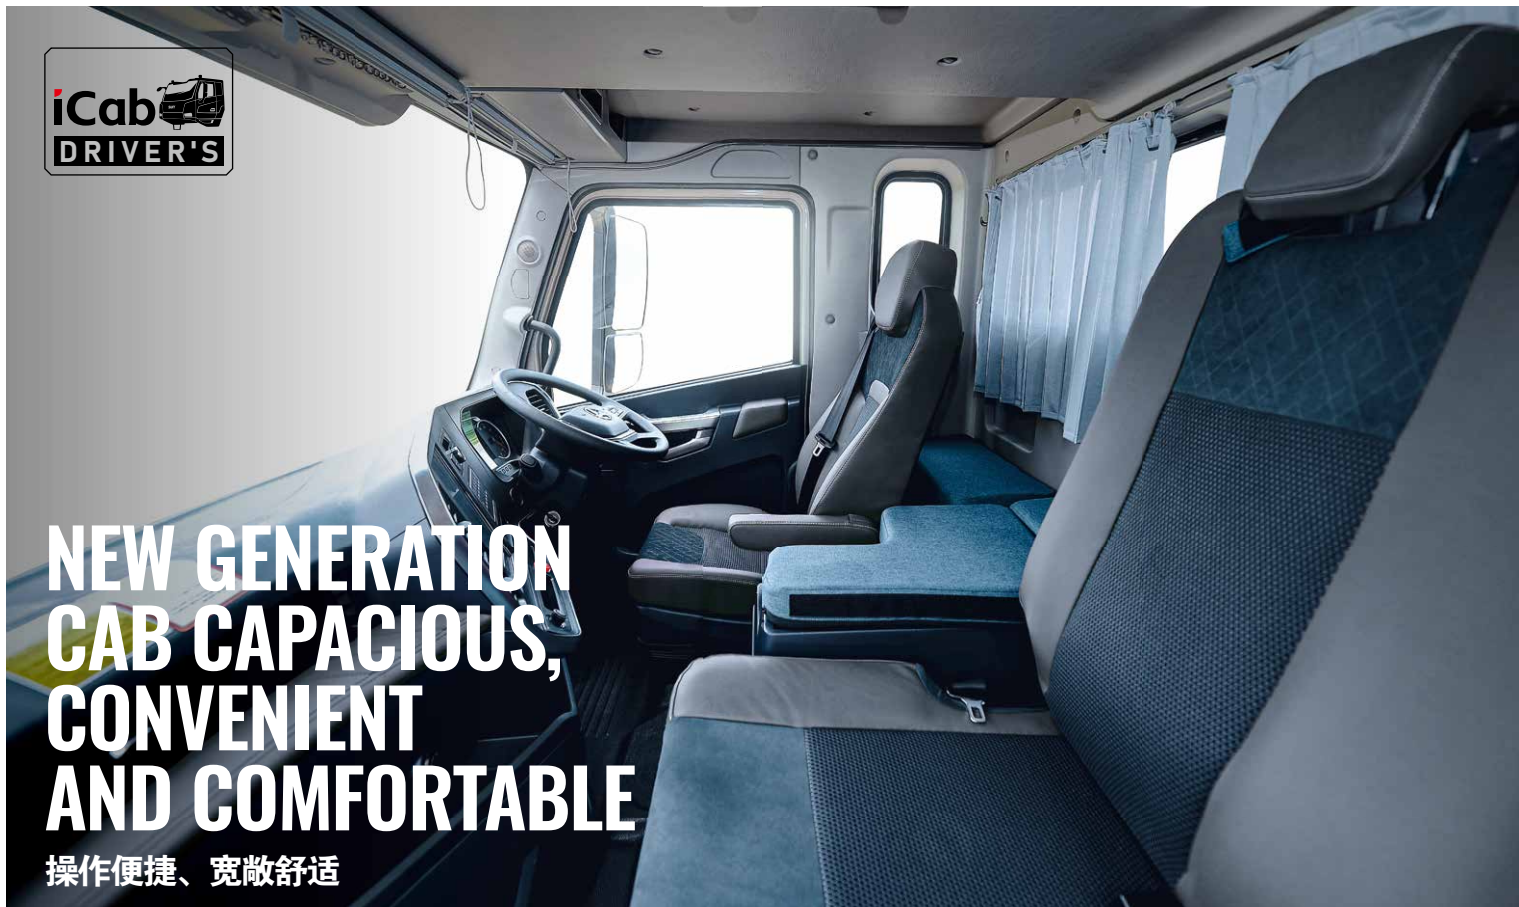

Driver's cab

新两室- 下车

- The seat with air suspension, making driving more comfortable.
- Double seats and foldable berth for the co-driver.
- Electric rearview mirror with electric heating, ensuring good field of view in foul weather. Adjustable high-brightness halogen light headlamps/fog lamps, providing clear vision at night.
- Reversing sensor with accurate distance detection capability, fully covering the parking area without blind spots, and effectively avoiding scratch and collision.
- Electric HVAC, able to adjust indoor temperature as demanded.
- 主驾驶位配备普通气浮减震座椅，驾驶更舒适。
- 副驾驶位设置双座椅可折叠式卧铺。
- 电动、电加热后视镜，不惧恶劣冰雪天气。高亮度可调节卤素大灯/雾灯，提供夜间清晰视野。
- 倒车雷达，探头后方无死角，精准探距，防碰撞。
- 电动冷暖空调，根据需求调整室内温度。



- 12.1-inch liquid crystal screen integrated with back-up image.
- 12.1寸液晶触摸大屏，集成倒车影像、影音功能。

BRAND-NEW OPERATOR'S CAB, HIGH-END COCKPIT

全新操纵室，高端座舱

Operator's cab

新两室-上车

- Seat widened by 450mm, and leg room increased by 30%.
- Optional cab tiltable by 0~20°, relieving cervical fatigue during large-angle and long-boom operations.
- Adjustable seat with maximum inclination of 140°, allowing the operator to lie flat and rest after work.


- 座椅、腿部活动空间较上一代增加 30%。
- 操纵室可实现 0~20° 上仰变位，大角度、长臂段作业可减缓颈椎疲劳。
- 可调式座椅，最大后仰 140°，操作手可以平躺休息。



OVERALL DIMENSIONS

整机尺寸

Unit: mm

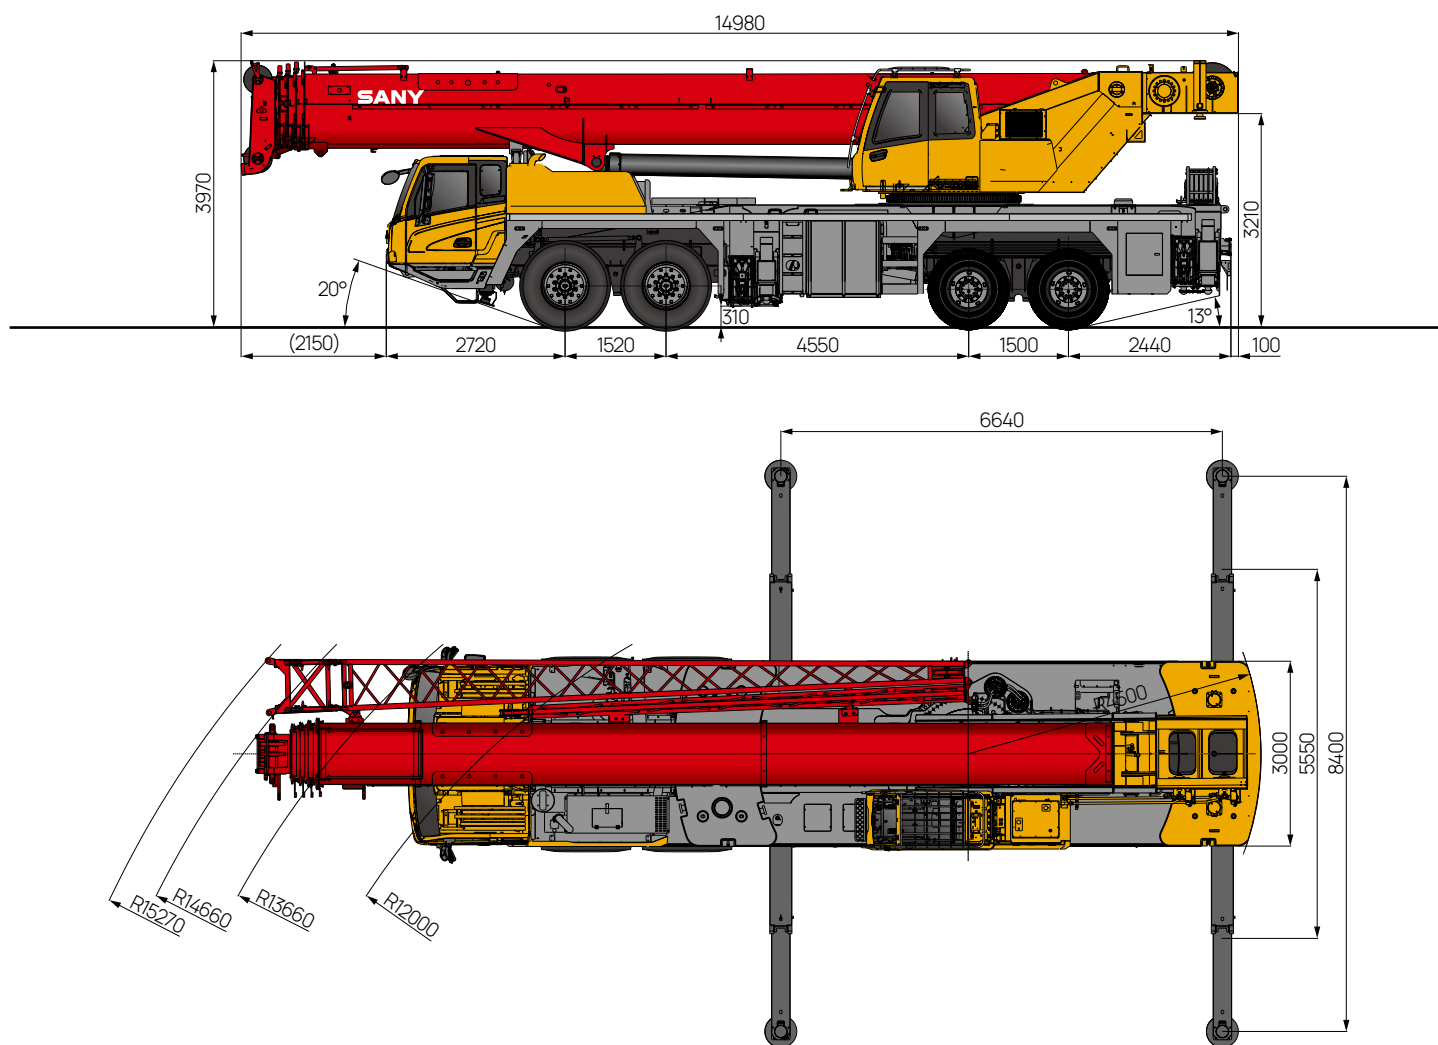

TECHNICAL SPECIFICATIONS

整机参数

CATEGORY 类型	ITEM 项目	UNIT 单位	VALUE 参数
CAPACITY 额定起重量	Max. lifting capacity 最大起重量	t	100
WEIGHT 重量参数	Gross weight 整机总质量	t	50
POWER (CHASSIS) 发动机参数(下车)	Engine model 发动机型号(排放标准)	-	Z10E385 31 (EU Stage III)
	Max. engine power 发动机最大功率	kW/rpm	283/1900
	Max. engine torque 发动机最大输出扭矩	N-m/rpm	1800/900~1400
DIMENSIONS 尺寸参数	Overall length 整机全长	mm	14980
	Overall width 整机全宽	mm	3000
	Overall height 整机全高	mm	3970
TRAVEL 行驶参数	Max. travel speed 最高行驶速度	km/h	85
	Min.steering radius 最小转弯半径	m	12
	Min.steering radius of boom tip 臂头最小转弯半径	m	15
	Wheel formula 车轮模式	-	8×4×4
	Min.ground clearance 最小离地间隙	mm	310
	Approach angle 接近角	°	20
	Departure angle 离去角	°	13
	Max.gradeability 最大爬坡度	-	50%
	Fuel consumption per 100km 每100公里油耗	L	45
MAIN PERFORMANCE 主要性能参数	Recommended working temperature range 推荐使用温度区间	°C	-25~+45
	Min.rated lifting radius 最小额定幅度	m	3
	Tail slewing radius 转台尾部回转半径	m	4.5
	Boom sections (Qty.) 臂节数	-	5
	Boom shape 臂形状	-	U shape U型
	Max.lifting moment 最大起重力矩	Basic boom 基本臂	kN·m 3557
		Full-extension boom 全伸主臂	kN·m 2509
		Longest boom + fixed jib combination 最长主臂+副臂组合	kN·m 1169
		Longest boom + boom extension + fixed jib combination 最长主臂+延伸臂+副臂组合	kN·m 740
	Boom length 臂长	Basic boom 基本臂	m 12.9
		Full-extension boom 全伸主臂	m 50.5
		Longest boom + fixed jib combination 最长主臂+副臂组合	m 68
		Longest boom + boom extension + fixed jib combination 最长主臂+延伸臂+副臂组合	m 77.5
	Max.lifting height 最大起重高度	Basic boom 基本臂	m 13.4
		Full-extension boom 全伸主臂	m 51
		Longest boom + fixed jib combination 最长主臂+副臂组合	m 68
		Longest boom + boom extension + fixed jib combination 最长主臂+延伸臂+副臂组合	m 77.5
	Outrigger span (Longitudinal×Transverse) 支腿跨距(纵×横)	m	8.4×6.64
	Jib offset 副臂安装角度	°	0, 15, 30
AIRCONDITIONER 空调	In operator's cab 上车空调	-	Heating & cooling 制冷、制热
	In driver's cab 下车空调	-	Heating & cooling 制冷、制热

TECHNICAL SPECIFICATIONS

整机参数

■ Axle Load 轴荷

	1	2	3	4		 Max.
Axle load / t 轴荷 / t	12	12	13	13	50t	85km/h

Remark 备注:

The fixed counterweight is mounted on the front support of the frame, with the main hook secured at the rear. The spare tire, auxiliary boom nose, and outrigger pads are excluded, the auxiliary hook is stored in its designated hook bucket.

固定装车架前配重座上，主钩装车架后方，不带备胎、臂尖滑轮、支腿盘，副钩放置在副钩桶。

	1	2	3	4		 Max.
Axle load / t 轴荷 / t	15	15	21.5	21.5	73t	20km/h

Remark 备注:

Capable of traveling with 25t counterweight: 2t + 6t mounted at the rear of the slewing platform, 6t + 7t stacked at the front of the frame, and 4t under the inclined bottom plate.

带载行驶配重状态可携带25t配重转场：转台后方挂载2t+6t，车架前面叠加放置6t+7t，转台斜底板下方挂载4t。

■ Hook 吊钩

			 kg	
7.5t	0	1	170	●
60t (Double hook 双钩)	5	10	600	●
75t (Single hook 单钩)	6	12	800	○
75t (Double hook 双钩)	5	10	735	○
90t	6	12	830	○
100t	7	14	1030	○


● Standard 标配 ○ Optional 选配

■ Operations 主要动作参数

			 L	 F
	135m/min	Φ20mm	275m	7.5t
	135m/min	Φ20mm	165m	7.5t
	1.5r/min			
	60s/90s (0~80°)			
	130s/140s (12.9m~50.5m)			
	35s (extension 伸) / 30s (Retraction 缩)			
	15s (extension 伸) / 15s (Retraction 缩)			

COUNTERWEIGHT

配重

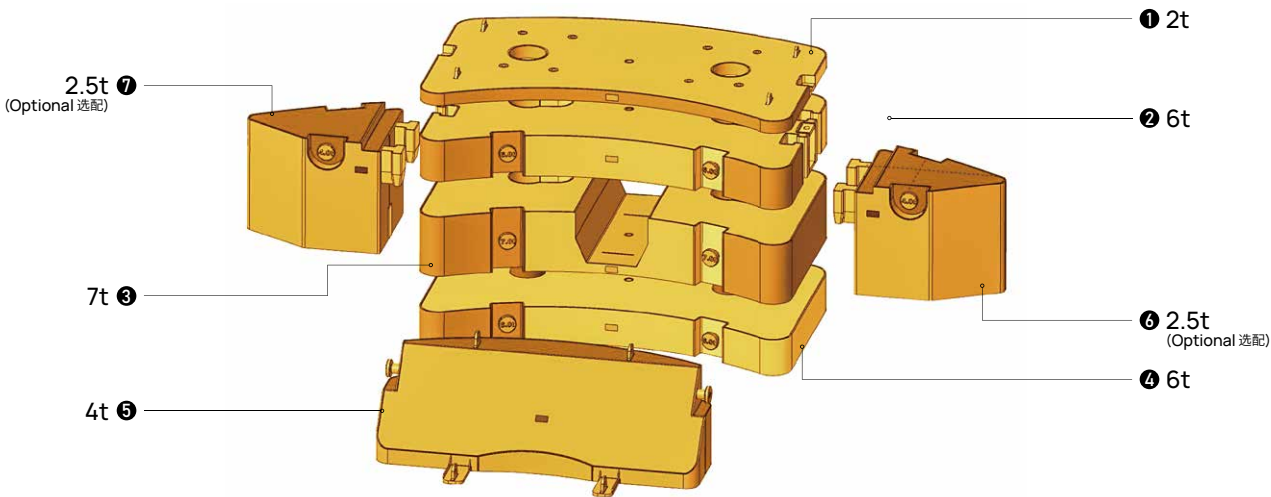


Total weight 总重量	① 2t	② 6t	③ 7t	④ 6t	⑤ 4t	⑥ 2.5t*	⑦ 2.5t*
0t							
2t	•						
4t					•		
6t	•				•		
8t	•			•			
12t	•			•	•		
14t	•	•		•			
15t	•		•	•			
18t	•	•		•	•		
19t	•		•	•	•		
21t	•	•	•	•			
25t	•	•	•	•	•		
26t*	•	•	•	•		•	•
30t*	•	•	•	•	•	•	•

* Optional 选配

Traveling with counterweight and hook block on board 带载行驶能力


Announcement Status
公告状态

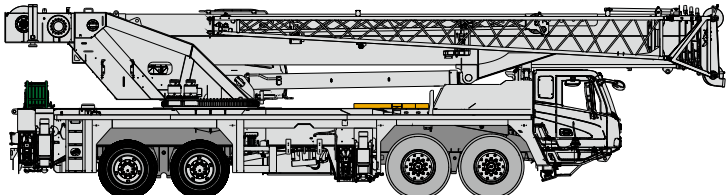

≤13t ≤13t ≤12t ≤12t

- ③ 2t
Middle counterweight 中间配重
- ④ 60t single pulley hook
60t单滑轮吊钩

Heavy-duty Transfer
重载转场

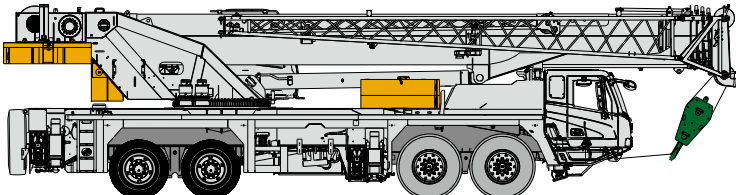

≤21.5t ≤21.5t ≤15t ≤15t

- ③ 13t (7+6)
Middle counterweight 中间配重
- ④ 12t (2+6+4)
Rear counterweight 尾部配重
- ④ 60t single pulley hook
60t单滑轮吊钩

MACHINE INTRODUCTION

整机介绍

Carrier 下车



Driver's cab 驾驶室

- Self-developed integral steel structure cab in ergonomic design, featuring vibration and external noise isolation.
- The cab is furnished in concept of convenience, safety, and comfort with pneumatic seats, seat belt, adjustable steering wheel, large rearview mirror, seat with headrest, demister, AC and control device, full set of controls and panels.
- More comfortable, safe and sue-friendly.
- 自主开发全宽钢整体式钢结构驾驶室，采用人体工程学原理设计，减震性和封闭性优良。
- 配备气动悬置的驾驶室与副驾座、三点安全带、可调整式的转向盘、大视野后视镜、配有头枕的舒适驾驶椅、防雾扇、冷暖空调等，控制仪器和仪表齐全。
- 更加舒适、安全、人性化。



Carrier frame 车架

- Designed and manufactured by Sany, the box-type structure is expanded in height and length, with its rigidity increased by 10%, featuring increased bearing capacity.
- 三一设计、制造，采用矩形截面结构，车架加高加宽，相较槽型车架，刚性提升10%，承载能力得到大幅提升。



Chassis engine 底盘发动机

- Model: DF Cummins Z10E385 31 Inline six-cylinder diesel engine with watercooler and inter cooler.
- Emission standard: Euro III.
- Fuel reservoir capacity: 450L.
- 型式：东康Z10E385 31，直列六缸、水冷却、增压中冷、柴油发动机。
- 排放标准：欧三。
- 燃料箱有效容积：450L。



Transmission 变速箱

- FAST manual transmission, 10 forward gears, 2 reversing gears, large speed ratio range, adaptable to slope climbing and high-speed traveling.
- FAST手动变速箱，变速箱有10个前进挡、2个后退挡，速比范围大，既可满足低速场地爬坡行驶又可满足高速行驶。



Transmission shaft 传动轴

- Optimized layout, higher torque output via contrate gear connecting transmission shaft cardan.
- 优化的传动轴布置，传动轴传动平稳、可靠。最优化力传输，采用端面齿联结传动轴，传递扭矩大。



Axle 车桥

- Axles 1, 2 are steered, axles 3, 4 are drive axles with built-in differential lock, realizing tougher ability to rough-terrain travelling. Two-stage reducer gear and more compact axle bags contribute to better trafficability. Press welding process strengthens the axle cover.
- 3、4轴为驱动轴，1、2轴为转向轴，驱动轴内置轴间和轮间差速器锁，使车辆有更强的脱困能力；双级减速，桥包体积更小，使车辆有更好的通过性；冲焊桥壳工艺，承载能力更强。



Suspension system 悬挂系统

- Front suspension is realized by independent leaf spring, and rear leaf spring balance suspension system. With leaf spring verified by 100,000 cycling fatigue tests, high strength and ride comfort are out of question.
- 前轴采用独立式钢板弹簧，中后轴采用摆动支架式钢板弹簧平衡悬架系统；板簧经过超过10万次的疲劳试验，同时优化前后板簧的性能参数，保证强度的同时兼顾乘坐的舒适性。



Steering 转向系统

- Axle 1 & 2 are steered mechanically with jydraulic power assisted system with large flow gearbox and hydro booster. Steering resistance decreased and operation made easier.
- 1轴+2轴采用液压助力机械转向，采用大流量转向器+转向助力油缸，大大减小转向阻力，转向更轻便。



Tires 轮胎

- 385/95R25+325/95R24 popular choice for heavy-duty trucks.
- 子午线轮胎，385/95R25+325/95R24，广泛适用于重型汽车，通用性强。



Wheel formula 车轮模式

- 8×4×4.
- 8×4×4。



Outrigger 支腿

- H-type layout, four point support, easy to operate, outrigger beam hydraulically telescoping, jack telescoping protected by two-way pilot controlled valve.
- H型支腿4点支撑，易操作、稳定性强；采用细晶粒高强度钢板材料，一、二级支腿全液压横向伸缩。垂直油缸采用双向液压锁进行安全保护。



Brake 制动系统

- The braking system includes service brake, parking brake, emergency braking, assisting brake and retarder brake
- Service brake: air servo, dual circuit split, wedge brake and double air chambers functioning on front axles.
- Parking brake: functioning at axles 3 and 4 by spring loaded air chamber.
- Emergency brake: performed by accumulator releasing pressure.
- Assisting brake: engine exhaust brake, safety assured when driving down long slopes.
- 制动系统包括行车制动、驻车制动、应急制动和辅助制动、缓速器制动。
- 行车制动采用双回路制动系统，所有车轮均用空气伺服制动器，前桥采用模式制动器+双气室，制动能力更强。
- 驻车制动是通过气室内弹簧作用在第三、四桥上。
- 应急制动阀由蓄能器储能断气制动兼做应急制动。
- 辅助制动为排气制动，保证在下长坡时的制动安全，保证行车的安全可靠。



Electrical system 电气系统

- 2*12V maintenance-free battery with a mechanical power switch, the overall power can be cut off manually. CAN instrument, data integration between superstructure and chassis.
- 2×12V 免维护蓄电池，配有机械式电源总开关，可手动切断整车电源；总线控制系统，可实现上下车信息交互。

MACHINE INTRODUCTION

整机介绍

■ Superstructure 上车



Operator's cab 操纵室

- It adopts pressed and welded construction, equipped with safety glass, sun shade, outward opening door, joystick mounted on the control box in line with the principle of man-machine engineering. Corrosion-resistant FRP reinforced structure, fully covered softened interior, panoramic skylight, operator seat back tiltable and other use-friendly design, making it comfortable and easy to operate. Touch screen of adjustable angle realizes multi-screen & multi-angle monitoring to ensure working safety and the one click operation. The main control console is combined with the operation display system for convenient man-machine interaction. Cab 20° tiltable, designed for easy observation of load at heights. Cooling & heating A/C available.
- 采用冲压成型的全焊接结构, 装有安全玻璃, 车窗装有遮阳帘, 外开式车门, 操纵杆安装在操纵箱上, 符合人机工程原理; 防腐玻璃钢强化复合结构、全覆盖软化内饰、全景式天窗、操作手座椅靠背可倾斜定位等人性化设计, 操作舒适、轻松; 触摸式显示屏, 视角可调节、多画面、多角度监控保证作业安全, 满足一键式操作; 主控台与操作显示系统有机结合, 人机交互方便快捷; 操纵室可向上倾斜20°, 满足高处的作业观察需要; 配备冷暖空调。



Boom & telescoping system 伸缩系统

- Five sections of U shape cross section welded by high strength structural steel. Dual cylinder with cable sheaves telescoping system.
- 12.9~50.5m boom, 17.5m jib and optional 9.5m boom extension, max. lifting height of boom + boom extension + jib 77.5m.
- 五节臂, 全伸臂长50.5m, 副臂17.5m, 可选配9.5m延伸臂, 带延伸臂副臂最大起升高度77.5m。由高强度焊接结构钢制成, U型截面, 双缸绳排。



Hoist 起升机构

- Efficient and energy saving speed regulation is realized by double variables of pump and motor. Winch balance valve coupled with exclusive anti-slip tech contribute to smoother hoisting.
- Normally closed type winch brake and winch balance valve are set to prevent hook falling and stalling.
- Standard 7.5t, 60t hook.
- The main winch adopts electric proportional variable motor with good inching performance and stationarity, and can realize infinitely variable speed, non-rotation main wire rope with 20mm diameter and 275m length, non-rotation auxiliary wire rope with 20mm diameter and 165m length.
- 泵、马达双变量调速, 高效节能。卷扬平衡阀与独特的防溜钩技术完美结合, 重物起落平稳。
- 常闭式卷扬制动器, 并设置卷扬平衡阀, 可防止落钩失速。
- 标配7.5t、60t吊钩。
- 主卷扬采用电比例变量马达, 卷扬微动性、平稳性好, 能实现无级变速。主、副卷扬钢丝绳直径均为20mm, 长度分别为275m, 165m。



Luffing system 变幅系统

- Passive luffing down with balance system, reducing energy cost yet raising stability. Luffing angle: $-1.5^{\circ} \sim 80^{\circ}$.
- 自重落幅, 更加节能。采用单根油缸, 前铰支布置, 变幅更省力且起重臂受力得到改善; 采用电比例控制平衡阀。变幅角度: $-1.5^{\circ} \sim 80^{\circ}$ 。



Counterweight 配重

- Movable counterweight features 14 combinations: 0, 2, 4, 6, 8, 12, 14, 15, 18, 19, 21, 25, 26, 30. See variable CW combination chart. CW assembly and disassembly controlled by remote device.
- 组合式可变平衡重。0/2/4/6/8/12/14/15/18/19/21/25/26/30共14种组合方式, 详见附件组合表, 可满足不同工况的需求, 最大限度发挥结构件性能, 可遥控拆卸及安装, 微动性好。



Slewing 回转系统

- Integrated slewing buffer valve with free swing function. Smooth slewing start & control with excellent inching performance.
- 带集成回转缓冲阀, 具有自由滑转功能, 回转启动和控制平稳, 微动性卓越。



Hydraulic system 液压系统

- The all new smart double pump flow system lifts maneuverability of combined motions by 50%. The boom can luff at shunting mode and telescope at confluence mode.
- Load sensing variable piston pump can control flow in high precision, reducing energy loss significantly.
- Electrically controlled valve functions flow compensation and load sensing control, securing stable control over single and combined motions.
- Electronically controlled variable motor for winch is of highly efficiency, stability and low noise. Max single rope lifting speed 135m/min.
- 采用全新开发双泵智能流量系统, 变幅独立, 伸臂合流, 复合动作操控性提升50%以上。
- 采用进口负载敏感变量柱塞泵, 能实时调节油泵排量, 实现高精度的流量控制, 极大的降低能量损耗。
- 电控主阀具备流量补偿、负载反馈控制功能, 能在各种工况下, 轻松实现单个动作和组合动作的稳定控制。
- 卷扬采用电控变量马达, 高速效率高, 低速稳定噪音小; 主副卷扬单绳最大速度达135m/min。



Control system 控制系统

- Vehicle data display system: equipped with multiple sensors to give timely feedback of data information, achieving real-time monitoring of the vehicle working state.
- Man-machine interaction interface: more user-friendly interface with rich and clear information. Customers can set the vehicle controllability according to their personal operation habits and different operating conditions to fully meet the preferred needs of customers.
- 整车数据显示系统: 配置丰富的传感器件, 及时反馈数据信息, 实现实时监控, 确保随时掌控整车工作状态。
- 人机交互界面: 人机交互界面设计人性化, 信息丰富而清晰, 客户可根据个人操作习惯和不同使用条件自行设置整车操控性, 充分满足客户的个性化需求。



Safety equipment 安全装置

- Load moment indicator: A method of analytical mechanics is adopted and a moment limiter calculation system based on the hoisting mechanics model is established. Through online empty-load calibration, the rated hoisting accuracy can reach $\pm 3\%$ to fully protect the hoisting operation.
- The hydraulic system is equipped with balance valve, relief valve, two-way holding valve, etc. to realize stability and reliability.
- Boom head and jib head are equipped with A2B switch to prevent the wire rope from over winding.
- The boom head is equipped with anemometer to detect whether the wind speed at heights exceeds the allowable range.
- The length & angle sensor and pressure sensor are equipped to display the operating status of the crane in real time, automatically cut off dangerous actions, and give a buzzer alarm.
- 采用分析力学方法, 建立了基于吊重力学模型的力矩限制器计算系统, 通过在线空载标定, 吊重精度达到 $\pm 3\%$ 。
- 液压系统配置液压平衡阀、溢流阀、双向液压锁等元件, 实现液压系统稳定可靠。
- 主、副臂臂端配置高度限位器, 防止钢丝绳过卷。
- 臂端装有风速仪, 检测高空风速是否超过可作业允许范围。
- 超起收放绳拉力保护程序, 副臂安装、吊载保护程序等。
- 配置长度角度传感器、压力传感器, 实时显示起重机作业状态, 自动切断危险动作, 蜂鸣报警。




Optional equipment at extra fees 选配

- 75t, 90t, 100t hook / 9.5m boom extension / outrigger pads.
- Special painting.
- Other equipment available upon request.
- 75吨吊钩/90吨吊钩/100吨吊钩/9.5米延伸臂/支腿垫板。
- 特殊涂装。
- 其他配置视需求定。

OPERATING RANGE - TELESCOPIC BOOM (T)


起升高度曲线 - 主臂

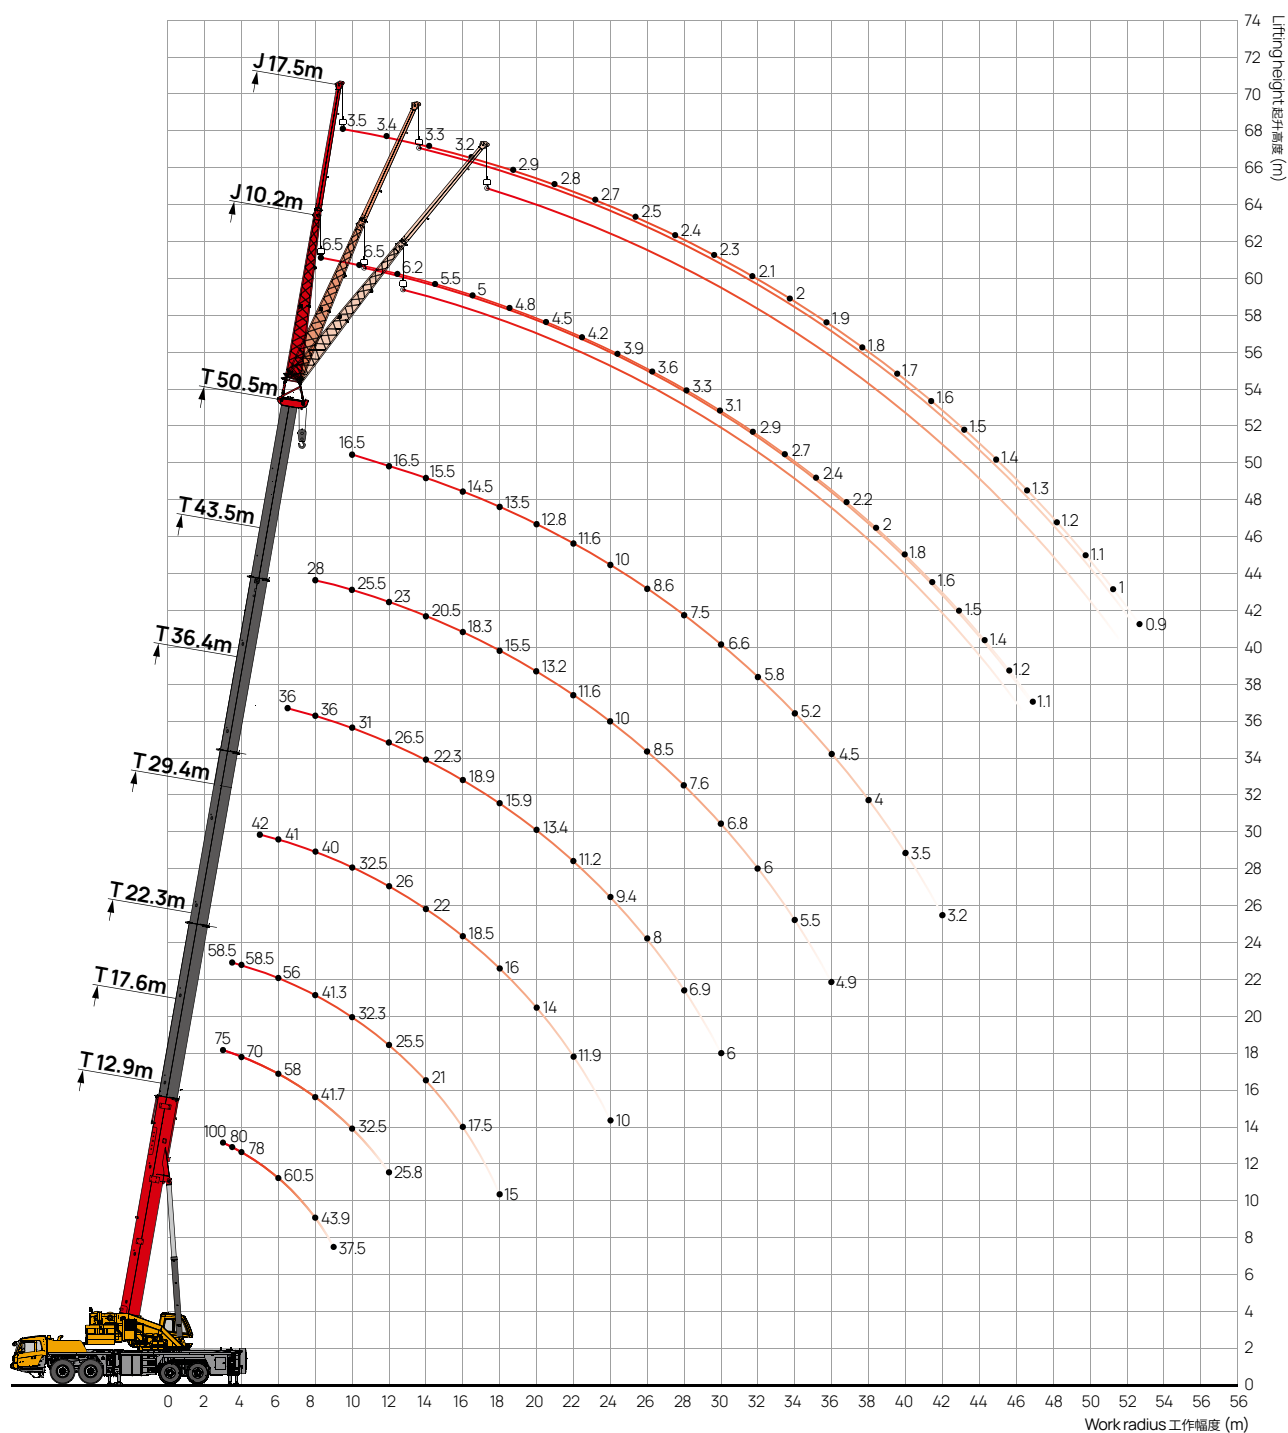

LOAD CHART - TELESCOPIC BOOM (T)

性能表 - 主臂

Unit: t




	12.9	20.0	27.0	34.1	41.1	17.6	24.7	31.7	38.8	45.8	22.3	29.4	36.4	43.5	50.5	
3.0	100.0	42.0				75.0										3.0
3.5	80.0	42.0				75.0					58.5					3.5
4.0	78.0	42.0				70.0	42.0				58.5					4.0
4.5	74.1	42.0	39.5			69.0	42.0				58.5					4.5
5.0	69.2	42.0	39.5			66.0	42.0				58.5	42.0				5.0
5.5	64.8	42.0	40.0			62.4	42.0	39.0			56.0	42.0				5.5
6.0	60.5	42.0	40.5	28.5		58.0	42.0	39.5			56.0	41.0				6.0
6.5	55.4	42.0	40.8	28.0		52.9	42.0	39.5			52.5	40.0	36.0			6.5
7.0	51.0	42.0	41.0	27.0		48.6	42.0	39.5	28.0		48.3	40.0	36.0			7.0
7.5	47.2	42.0	41.2	26.0	19.0	44.9	41.5	39.5	27.5		44.6	40.0	36.0			7.5
8.0	43.9	42.0	41.5	25.6	19.0	41.7	41.0	39.0	27.0		41.3	40.0	36.0	28.0		8.0
9.0	37.5	39.3	39.0	24.1	19.0	36.6	38.0	36.0	26.0	19.0	36.3	36.5	33.5	27.0		9.0
10.0		35.1	34.5	22.3	18.5	32.5	34.0	33.9	24.0	18.5	32.3	32.5	31.0	25.5	16.5	10.0
11.0		31.2	31.0	21.5	17.5	29.0	30.5	31.2	23.0	17.8	28.5	29.0	28.5	24.5	16.5	11.0
12.0		28.2	28.2	21.0	16.5	25.8	27.6	29.0	22.0	17.0	25.5	26.0	26.5	23.0	16.5	12.0
14.0		23.1	24.0	19.0	15.5		23.0	24.0	20.5	15.8	21.0	22.0	22.3	20.5	15.5	14.0
16.0		19.5	20.6	17.2	14.5		19.5	20.0	18.5	14.8	17.5	18.5	18.9	18.3	14.5	16.0
18.0			17.5	15.2	13.0		17.0	17.0	16.1	13.4	15.0	16.0	15.9	15.5	13.5	18.0
20.0			15.5	13.6	12.0		14.8	14.5	14.0	12.3		14.0	13.4	13.2	12.8	20.0
22.0			13.8	12.1	11.2			13.0	12.5	11.1		11.9	11.2	11.6	11.6	22.0
24.0				10.9	10.2			11.4	11.0	10.1		10.0	9.4	10.0	10.0	24.0
26.0				9.6	9.2			9.8	9.2	9.2			8.0	8.5	8.6	26.0
28.0				8.5	8.4				8.2	8.2			6.9	7.6	7.5	28.0
30.0					7.7				7.5	7.4			6.0	6.8	6.6	30.0
32.0					7.0				6.9	6.6				6.0	5.8	32.0
34.0					6.4					6.0				5.5	5.2	34.0
36.0										5.2				4.9	4.5	36.0
38.0										4.8					4.0	38.0
40.0															3.5	40.0
42.0															3.2	42.0
44.0																44.0
	14	6	6	4	3	10	6	6	4	3	8	6	5	4	3	
2#	0	0	0	0	0	50	50	50	50	50	100	100	100	100	100	2#
3#	0	25	50	75	100	0	25	50	75	100	0	25	50	75	100	3#
4#	0	25	50	75	100	0	25	50	75	100	0	25	50	75	100	4#
5#	0	25	50	75	100	0	25	50	75	100	0	25	50	75	100	5#

LOAD CHART - TELESCOPIC BOOM (T)

性能表 - 主臂

Unit: t




	12.9	20.0	27.0	34.1	41.1	17.6	24.7	31.7	38.8	45.8	22.3	29.4	36.4	43.5	50.5	
3.0	100.0	42.0				75.0										3.0
3.5	80.0	42.0				75.0					58.5					3.5
4.0	78.0	42.0				70.0	42.0				58.5					4.0
4.5	74.1	42.0	39.5			69.0	42.0				58.5					4.5
5.0	69.2	42.0	39.5			66.0	42.0				58.5	42.0				5.0
5.5	64.8	42.0	40.0			62.4	42.0	39.0			56.0	42.0				5.5
6.0	60.5	42.0	40.5	28.5		58.0	42.0	39.5			56.0	41.0				6.0
6.5	55.4	42.0	40.8	28.0		52.9	42.0	39.5			52.5	40.0	36.0			6.5
7.0	51.0	42.0	41.0	27.0		48.6	42.0	39.5	28.0		48.3	40.0	36.0			7.0
7.5	47.2	42.0	41.2	26.0	19.0	44.9	41.5	39.5	27.5		44.6	40.0	36.0			7.5
8.0	43.9	42.0	41.5	25.6	19.0	41.7	41.0	39.0	27.0		41.3	40.0	36.0	28.0		8.0
9.0	37.5	39.3	39.0	24.1	19.0	36.6	38.0	36.0	26.0	19.0	36.3	36.5	33.5	27.0		9.0
10.0		35.1	34.5	22.3	18.5	32.5	34.0	33.9	24.0	18.5	32.3	32.5	31.0	25.5	16.5	10.0
11.0		31.2	31.0	21.5	17.5	29.0	30.5	31.2	23.0	17.8	28.5	29.0	28.5	24.5	16.5	11.0
12.0		28.2	28.2	21.0	16.5	25.8	27.6	29.0	22.0	17.0	25.5	26.0	26.5	23.0	16.5	12.0
14.0		23.1	24.0	19.0	15.5		23.0	24.0	20.5	15.8	21.0	22.0	22.3	20.5	15.5	14.0
16.0		19.5	20.6	17.2	14.5		19.5	20.0	18.5	14.8	17.5	18.5	18.9	18.3	14.5	16.0
18.0			17.5	15.2	13.0		16.5	17.0	16.1	13.4	14.4	15.8	15.9	15.5	13.5	18.0
20.0			15.3	13.6	12.0		13.6	14.5	14.0	12.3		13.0	13.4	13.2	12.8	20.0
22.0			13.0	12.1	11.2			12.2	12.5	11.1		10.8	11.2	11.6	11.6	22.0
24.0				10.9	10.2			10.4	10.9	10.1		9.0	9.4	10.0	10.0	24.0
26.0				9.6	9.2			9.0	9.2	9.2			8.0	8.5	8.6	26.0
28.0				8.5	8.4				8.2	8.2			6.9	7.6	7.5	28.0
30.0					7.7				7.2	7.4			6.0	6.6	6.6	30.0
32.0					7.0				6.2	6.6				5.7	5.8	32.0
34.0					6.4					5.8				4.9	5.2	34.0
36.0										5.1				4.2	4.5	36.0
38.0										4.5					4.0	38.0
40.0															3.5	40.0
42.0															3.0	42.0
44.0																44.0
	14	6	6	4	3	10	6	6	4	3	8	6	5	4	3	
2#	0	0	0	0	0	50	50	50	50	50	100	100	100	100	100	2#
3#	0	25	50	75	100	0	25	50	75	100	0	25	50	75	100	3#
4#	0	25	50	75	100	0	25	50	75	100	0	25	50	75	100	4#
5#	0	25	50	75	100	0	25	50	75	100	0	25	50	75	100	5#

LOAD CHART - TELESCOPIC BOOM (T)

性能表 - 主臂

Unit: t




	12.9	20.0	27.0	34.1	41.1	17.6	24.7	31.7	38.8	45.8	22.3	29.4	36.4	43.5	50.5	
3.0	100.0	42.0				75.0										3.0
3.5	80.0	42.0				75.0					58.5					3.5
4.0	78.0	42.0				70.0	42.0				58.5					4.0
4.5	74.1	42.0	39.5			69.0	42.0				58.5					4.5
5.0	69.2	42.0	39.5			66.0	42.0				58.5	42.0				5.0
5.5	64.8	42.0	40.0			62.4	42.0	39.0			56.0	42.0				5.5
6.0	60.5	42.0	40.5	28.5		58.0	42.0	39.5			56.0	41.0				6.0
6.5	55.4	42.0	40.8	28.0		52.9	42.0	39.5			52.5	40.0	36.0			6.5
7.0	51.0	42.0	41.0	27.0		48.6	42.0	39.5	28.0		48.3	40.0	36.0			7.0
7.5	47.2	42.0	41.2	26.0	19.0	44.9	41.5	39.5	27.5		44.6	40.0	36.0			7.5
8.0	43.9	42.0	41.5	25.6	19.0	41.7	41.0	39.0	27.0		41.3	40.0	36.0	28.0		8.0
9.0	37.5	39.3	39.0	24.1	19.0	36.6	38.0	36.0	26.0	19.0	36.3	36.5	33.5	27.0		9.0
10.0		35.1	34.5	22.3	18.5	32.5	34.0	33.9	24.0	18.5	32.3	32.5	31.0	25.5	16.5	10.0
11.0		31.2	31.0	21.5	17.5	29.0	30.5	31.2	23.0	17.8	28.5	29.0	28.5	24.5	16.5	11.0
12.0		28.2	28.2	21.0	16.5	25.8	27.6	29.0	22.0	17.0	25.5	26.0	26.5	23.0	16.5	12.0
14.0		23.1	24.0	19.0	15.5		23.0	24.0	20.5	15.8	21.0	22.0	22.3	20.5	15.5	14.0
16.0		19.5	20.6	17.2	14.5		19.5	20.0	18.5	14.8	17.3	18.5	18.9	18.3	14.5	16.0
18.0			17.5	15.2	13.0		15.8	16.6	16.1	13.4	13.7	15.2	15.9	15.5	13.5	18.0
20.0			14.7	13.6	12.0		13.1	13.9	14.0	12.3		12.4	13.2	13.2	12.8	20.0
22.0			12.5	12.1	11.2			11.7	12.2	11.1		10.3	11.1	11.6	11.6	22.0
24.0				10.9	10.2			10.0	10.4	10.1		8.6	9.4	9.9	10.0	24.0
26.0				9.6	9.2			8.5	9.0	9.2			7.9	8.5	8.6	26.0
28.0				8.5	8.4				7.8	8.1			6.8	7.3	7.5	28.0
30.0					7.7				6.8	7.1			5.7	6.2	6.6	30.0
32.0					6.8				5.9	6.2				5.4	5.7	32.0
34.0					6.1					5.5				4.6	5.0	34.0
36.0										4.8				4.0	4.3	36.0
38.0										4.2					3.7	38.0
40.0															3.2	40.0
42.0															2.8	42.0
44.0																44.0
	14	6	6	4	3	10	6	6	4	3	8	6	5	4	3	
2#	0	0	0	0	0	50	50	50	50	50	100	100	100	100	100	2#
3#	0	25	50	75	100	0	25	50	75	100	0	25	50	75	100	3#
4#	0	25	50	75	100	0	25	50	75	100	0	25	50	75	100	4#
5#	0	25	50	75	100	0	25	50	75	100	0	25	50	75	100	5#

LOAD CHART - TELESCOPIC BOOM (T)

性能表 - 主臂

Unit: t




	12.9	20.0	27.0	34.1	41.1	17.6	24.7	31.7	38.8	45.8	22.3	29.4	36.4	43.5	50.5	
3.0	100.0	42.0				75.0										3.0
3.5	80.0	42.0				75.0					58.5					3.5
4.0	78.0	42.0				70.0	42.0				58.5					4.0
4.5	74.1	42.0	39.5			69.0	42.0				58.5					4.5
5.0	69.2	42.0	39.5			66.0	42.0				58.5	42.0				5.0
5.5	64.8	42.0	40.0			62.4	42.0	39.0			56.0	42.0				5.5
6.0	60.5	42.0	40.5	28.5		58.0	42.0	39.5			56.0	41.0				6.0
6.5	55.4	42.0	40.8	28.0		52.9	42.0	39.5			52.5	40.0	36.0			6.5
7.0	51.0	42.0	41.0	27.0		48.6	42.0	39.5	28.0		48.3	40.0	36.0			7.0
7.5	47.2	42.0	41.2	26.0	19.0	44.9	41.5	39.5	27.5		44.6	40.0	36.0			7.5
8.0	43.9	42.0	41.5	25.6	19.0	41.7	41.0	39.0	27.0		41.3	40.0	36.0	28.0		8.0
9.0	37.5	39.3	39.0	24.1	19.0	36.6	38.0	36.0	26.0	19.0	36.3	36.5	33.5	27.0		9.0
10.0		35.1	34.5	22.3	18.5	32.5	34.0	33.9	24.0	18.5	32.3	32.5	31.0	25.5	16.5	10.0
11.0		31.2	31.0	21.5	17.5	29.0	30.5	31.2	23.0	17.8	28.5	29.0	28.5	24.5	16.5	11.0
12.0		28.2	28.2	21.0	16.5	25.8	27.6	28.8	22.0	17.0	25.5	26.0	26.5	23.0	16.5	12.0
14.0		23.1	24.0	19.0	15.5		22.6	23.5	20.5	15.8	20.3	21.9	22.3	20.5	15.5	14.0
16.0		18.8	19.6	17.2	14.5		17.9	18.7	18.5	14.8	15.7	17.2	18.0	18.3	14.5	16.0
18.0			16.1	15.2	13.0		14.4	15.3	15.8	13.4	12.3	13.8	14.6	15.2	13.5	18.0
20.0			13.5	13.6	12.0		11.8	12.7	13.2	12.3		11.2	12.0	12.6	12.8	20.0
22.0			11.4	11.8	11.2			10.6	11.1	11.1		9.2	10.0	10.5	10.9	22.0
24.0				10.2	10.2			9.0	9.5	9.8		7.6	8.4	8.9	9.3	24.0
26.0				8.8	9.1			7.6	8.1	8.4			7.1	7.6	7.9	26.0
28.0				7.7	7.9				7.0	7.3			5.9	6.4	6.8	28.0
30.0					7.0				6.0	6.3			5.0	5.5	5.8	30.0
32.0					6.1				5.2	5.5				4.7	5.0	32.0
34.0					5.4					4.8				4.0	4.3	34.0
36.0										4.2				3.3	3.7	36.0
38.0										3.6					3.1	38.0
40.0															2.6	40.0
42.0															2.2	42.0
44.0																44.0
	14	6	6	4	3	10	6	6	4	3	8	6	5	4	3	
2#	0	0	0	0	0	50	50	50	50	50	100	100	100	100	100	2#
3#	0	25	50	75	100	0	25	50	75	100	0	25	50	75	100	3#
4#	0	25	50	75	100	0	25	50	75	100	0	25	50	75	100	4#
5#	0	25	50	75	100	0	25	50	75	100	0	25	50	75	100	5#

LOAD CHART - TELESCOPIC BOOM (T)

性能表 - 主臂

Unit: t




	12.9	20.0	27.0	34.1	41.1	17.6	24.7	31.7	38.8	45.8	22.3	29.4	36.4	43.5	50.5	
3.0	100.0	42.0				75.0										3.0
3.5	80.0	42.0				75.0					58.5					3.5
4.0	78.0	42.0				70.0	42.0				58.5					4.0
4.5	74.1	42.0	39.5			69.0	42.0				58.5					4.5
5.0	69.2	42.0	39.5			66.0	42.0				58.5	42.0				5.0
5.5	64.8	42.0	40.0			62.4	42.0	39.0			56.0	42.0				5.5
6.0	59.2	42.0	40.5	28.5		58.0	42.0	39.5			56.0	41.0				6.0
6.5	54.3	42.0	40.8	28.0		52.9	42.0	39.5			52.5	40.0	36.0			6.5
7.0	50.1	42.0	41.0	27.0		48.6	42.0	39.5	28.0		48.3	40.0	36.0			7.0
7.5	46.5	42.0	41.2	26.0	19.0	44.9	41.5	39.5	27.5		44.6	40.0	36.0			7.5
8.0	43.3	42.0	41.5	25.6	19.0	41.7	41.0	39.0	27.0		41.3	40.0	36.0	28.0		8.0
9.0	37.5	39.1	39.0	24.1	19.0	36.6	38.0	36.0	26.0	19.0	36.3	36.5	33.5	27.0		9.0
10.0		34.8	34.5	22.3	18.5	32.5	34.0	33.9	24.0	18.5	32.3	32.5	31.0	25.5	16.5	10.0
11.0		31.2	31.0	21.5	17.5	29.0	30.4	31.1	23.0	17.8	28.5	29.0	28.5	24.5	16.5	11.0
12.0		28.2	28.2	21.0	16.5	25.8	27.5	28.1	22.0	17.0	25.3	26.0	26.5	23.0	16.5	12.0
14.0		22.1	22.9	19.0	15.5		21.1	22.0	20.5	15.8	18.8	20.4	21.3	20.5	15.5	14.0
16.0		17.6	18.4	17.2	14.5		16.6	17.5	18.0	14.8	14.5	15.9	16.8	17.4	14.5	16.0
18.0			15.1	15.2	13.0		13.4	14.2	14.7	13.4	11.3	12.7	13.5	14.1	13.5	18.0
20.0			12.6	13.0	12.0		10.9	11.7	12.2	12.3		10.3	11.1	11.6	12.0	20.0
22.0			10.6	11.0	11.2			9.8	10.3	10.6		8.4	9.2	9.7	10.1	22.0
24.0				9.4	9.7			8.2	8.7	9.0		6.8	7.6	8.1	8.5	24.0
26.0				8.1	8.4			7.0	7.4	7.7			6.4	6.9	7.2	26.0
28.0				7.1	7.3				6.4	6.7			5.3	5.8	6.2	28.0
30.0					6.4				5.4	5.8			4.4	4.9	5.2	30.0
32.0					5.6				4.6	5.0				4.1	4.5	32.0
34.0					4.9					4.3				3.4	3.8	34.0
36.0										3.7				2.8	3.2	36.0
38.0										3.1					2.6	38.0
40.0															2.2	40.0
42.0															1.7	42.0
44.0																44.0
	14	6	6	4	3	10	6	6	4	3	8	6	5	4	3	
2#	0	0	0	0	0	50	50	50	50	50	100	100	100	100	100	2#
3#	0	25	50	75	100	0	25	50	75	100	0	25	50	75	100	3#
4#	0	25	50	75	100	0	25	50	75	100	0	25	50	75	100	4#
5#	0	25	50	75	100	0	25	50	75	100	0	25	50	75	100	5#

LOAD CHART - TELESCOPIC BOOM (T)

性能表 - 主臂

Unit: t




	12.9	20.0	27.0	34.1	41.1	17.6	24.7	31.7	38.8	45.8	22.3	29.4	36.4	43.5	50.5	
3.0	100.0	42.0				75.0										3.0
3.5	80.0	42.0				75.0					58.5					3.5
4.0	78.0	42.0				70.0	42.0				58.5					4.0
4.5	74.1	42.0	39.5			69.0	42.0				58.5					4.5
5.0	69.2	42.0	39.5			66.0	42.0				58.5	42.0				5.0
5.5	64.4	42.0	40.0			62.4	42.0	39.0			56.0	42.0				5.5
6.0	58.7	42.0	40.5	28.5		57.9	42.0	39.5			56.0	41.0				6.0
6.5	53.9	42.0	40.8	28.0		52.9	42.0	39.5			52.5	40.0	36.0			6.5
7.0	49.7	42.0	41.0	27.0		48.6	42.0	39.5	28.0		48.3	40.0	36.0			7.0
7.5	46.1	42.0	41.2	26.0	19.0	44.9	41.5	39.5	27.5		44.6	40.0	36.0			7.5
8.0	42.9	42.0	41.5	25.6	19.0	41.7	41.0	39.0	27.0		41.3	40.0	36.0	28.0		8.0
9.0	37.5	38.8	39.0	24.1	19.0	36.6	38.0	36.0	26.0	19.0	36.3	36.5	33.5	27.0		9.0
10.0		34.5	34.5	22.3	18.5	32.5	33.7	33.9	24.0	18.5	32.2	32.5	31.0	25.5	16.5	10.0
11.0		31.0	31.0	21.5	17.5	29.0	30.2	30.8	23.0	17.8	28.5	29.0	28.5	24.5	16.5	11.0
12.0		28.0	28.2	21.0	16.5	25.2	27.0	27.9	22.0	17.0	24.6	26.0	26.5	23.0	16.5	12.0
14.0		21.6	22.4	19.0	15.5		20.5	21.4	20.5	15.8	18.3	19.8	20.7	20.5	15.5	14.0
16.0		17.1	17.9	17.2	14.5		16.1	17.0	17.5	14.8	14.0	15.4	16.3	16.9	14.5	16.0
18.0			14.7	15.1	13.0		13.0	13.8	14.3	13.4	10.9	12.3	13.1	13.7	13.5	18.0
20.0			12.2	12.6	12.0		10.5	11.4	11.9	12.2		9.9	10.7	11.3	11.7	20.0
22.0			10.3	10.7	10.9			9.5	10.0	10.3		8.0	8.9	9.4	9.8	22.0
24.0				9.1	9.4			7.9	8.4	8.7		6.5	7.3	7.9	8.2	24.0
26.0				7.9	8.1			6.7	7.2	7.5			6.1	6.6	7.0	26.0
28.0				6.8	7.1				6.1	6.4			5.0	5.5	5.9	28.0
30.0					6.1				5.2	5.5			4.1	4.6	5.0	30.0
32.0					5.3				4.4	4.7				3.9	4.2	32.0
34.0					4.7					4.1				3.2	3.6	34.0
36.0										3.5				2.6	3.0	36.0
38.0										2.9					2.4	38.0
40.0															2.0	40.0
42.0															1.6	42.0
44.0																44.0
	14	6	6	4	3	10	6	6	4	3	8	6	5	4	3	
2#	0	0	0	0	0	50	50	50	50	50	100	100	100	100	100	2#
3#	0	25	50	75	100	0	25	50	75	100	0	25	50	75	100	3#
4#	0	25	50	75	100	0	25	50	75	100	0	25	50	75	100	4#
5#	0	25	50	75	100	0	25	50	75	100	0	25	50	75	100	5#

LOAD CHART - TELESCOPIC BOOM (T)

性能表 - 主臂

Unit: t




	12.9	20.0	27.0	34.1	41.1	17.6	24.7	31.7	38.8	45.8	22.3	29.4	36.4	43.5	50.5	
3.0	100.0	42.0				75.0										3.0
3.5	80.0	42.0				75.0					58.5					3.5
4.0	78.0	42.0				70.0	42.0				58.5					4.0
4.5	74.1	42.0	39.5			69.0	42.0				58.5					4.5
5.0	69.2	42.0	39.5			66.0	42.0				58.5	42.0				5.0
5.5	63.6	42.0	40.0			62.4	42.0	39.0			56.0	42.0				5.5
6.0	58.0	42.0	40.5	28.5		57.2	42.0	39.5			56.0	41.0				6.0
6.5	53.2	42.0	40.8	28.0		52.4	42.0	39.5			52.0	40.0	36.0			6.5
7.0	49.1	42.0	41.0	27.0		48.3	42.0	39.5	28.0		47.9	40.0	36.0			7.0
7.5	45.5	42.0	41.2	26.0	19.0	44.8	41.5	39.5	27.5		44.3	40.0	36.0			7.5
8.0	42.4	42.0	41.5	25.6	19.0	41.6	41.0	39.0	27.0		41.2	40.0	36.0	28.0		8.0
9.0	37.1	38.3	38.8	24.1	19.0	36.4	37.5	36.0	26.0	19.0	35.9	36.5	33.5	27.0		9.0
10.0		34.0	34.5	22.3	18.5	32.1	33.3	33.9	24.0	18.5	31.7	32.5	31.0	25.5	16.5	10.0
11.0		30.5	31.0	21.5	17.5	27.8	29.7	30.4	23.0	17.8	27.2	28.9	28.5	24.5	16.5	11.0
12.0		26.5	27.3	21.0	16.5	23.6	25.4	26.3	22.0	17.0	23.0	24.6	25.6	23.0	16.5	12.0
14.0		20.2	21.0	19.0	15.5		19.2	20.1	20.5	15.8	16.9	18.5	19.4	20.0	15.5	14.0
16.0		16.0	16.8	17.2	14.5		15.0	15.9	16.4	14.8	12.9	14.3	15.2	15.8	14.5	16.0
18.0			13.7	14.1	13.0		12.0	12.8	13.3	13.4	9.9	11.3	12.2	12.7	13.1	18.0
20.0			11.4	11.8	12.0		9.7	10.5	11.0	11.3		9.1	9.9	10.4	10.8	20.0
22.0			9.5	9.9	10.2			8.7	9.2	9.5		7.2	8.1	8.6	9.0	22.0
24.0				8.4	8.7			7.2	7.7	8.0		5.8	6.6	7.1	7.5	24.0
26.0				7.2	7.4			6.0	6.5	6.8			5.4	5.9	6.3	26.0
28.0				6.2	6.4				5.5	5.8			4.4	4.9	5.3	28.0
30.0					5.5				4.6	4.9			3.5	4.1	4.4	30.0
32.0					4.8				3.9	4.2				3.3	3.7	32.0
34.0					4.2					3.5				2.7	3.0	34.0
36.0										3.0				2.1	2.5	36.0
38.0										2.5					2.0	38.0
40.0															1.6	40.0
42.0															1.2	42.0
44.0																44.0
	14	6	6	4	3	10	6	6	4	3	8	6	5	4	3	
2#	0	0	0	0	0	50	50	50	50	50	100	100	100	100	100	2#
3#	0	25	50	75	100	0	25	50	75	100	0	25	50	75	100	3#
4#	0	25	50	75	100	0	25	50	75	100	0	25	50	75	100	4#
5#	0	25	50	75	100	0	25	50	75	100	0	25	50	75	100	5#

LOAD CHART - TELESCOPIC BOOM (T)

性能表 - 主臂

Unit: t




	12.9	20.0	27.0	34.1	41.1	17.6	24.7	31.7	38.8	45.8	22.3	29.4	36.4	43.5	50.5	
3.0	100.0	42.0				75.0										3.0
3.5	80.0	42.0				75.0					58.5					3.5
4.0	78.0	42.0				70.0	42.0				58.5					4.0
4.5	74.1	42.0	39.5			69.0	42.0				58.5					4.5
5.0	69.2	42.0	39.5			66.0	42.0				58.5	42.0				5.0
5.5	63.1	42.0	40.0			62.3	42.0	39.0			56.0	42.0				5.5
6.0	57.5	42.0	40.5	28.5		56.7	42.0	39.5			56.0	41.0				6.0
6.5	52.8	42.0	40.8	28.0		52.0	42.0	39.5			51.6	40.0	36.0			6.5
7.0	48.7	42.0	41.0	27.0		48.0	42.0	39.5	28.0		47.5	40.0	36.0			7.0
7.5	45.2	42.0	41.2	26.0	19.0	44.4	41.5	39.5	27.5		44.0	40.0	36.0			7.5
8.0	42.0	42.0	41.5	25.6	19.0	41.3	41.0	39.0	27.0		40.8	40.0	36.0	28.0		8.0
9.0	36.8	38.0	38.5	24.1	19.0	36.1	37.2	36.0	26.0	19.0	35.6	36.5	33.5	27.0		9.0
10.0		33.8	34.3	22.3	18.5	31.9	33.0	33.6	24.0	18.5	31.4	32.5	31.0	25.5	16.5	10.0
11.0		30.1	30.8	21.5	17.5	27.0	28.9	29.9	23.0	17.8	26.4	28.1	28.5	24.5	16.5	11.0
12.0		25.8	26.6	21.0	16.5	22.9	24.7	25.6	22.0	17.0	22.3	23.9	24.9	23.0	16.5	12.0
14.0		19.7	20.5	19.0	15.5		18.6	19.5	20.1	15.8	16.4	17.9	18.8	19.4	15.5	14.0
16.0		15.5	16.3	16.7	14.5		14.5	15.4	15.9	14.8	12.4	13.8	14.7	15.3	14.5	16.0
18.0			13.3	13.7	13.0		11.6	12.4	12.9	13.3	9.5	10.9	11.8	12.3	12.7	18.0
20.0			11.0	11.4	11.6		9.3	10.2	10.7	11.0		8.7	9.5	10.1	10.4	20.0
22.0			9.2	9.6	9.8			8.3	8.8	9.2		6.9	7.7	8.3	8.6	22.0
24.0				8.1	8.4			6.9	7.4	7.7		5.5	6.3	6.8	7.2	24.0
26.0				6.9	7.2			5.7	6.2	6.5			5.1	5.6	6.0	26.0
28.0				5.9	6.2				5.2	5.5			4.1	4.6	5.0	28.0
30.0					5.3				4.4	4.7			3.3	3.8	4.2	30.0
32.0					4.6				3.6	4.0				3.1	3.5	32.0
34.0					3.9					3.3				2.5	2.8	34.0
36.0										2.8				1.9	2.3	36.0
38.0										2.3					1.8	38.0
40.0															1.4	40.0
42.0															1.0	42.0
44.0																44.0
	14	6	6	4	3	10	6	6	4	3	8	6	5	4	3	
2#	0	0	0	0	0	50	50	50	50	50	100	100	100	100	100	2#
3#	0	25	50	75	100	0	25	50	75	100	0	25	50	75	100	3#
4#	0	25	50	75	100	0	25	50	75	100	0	25	50	75	100	4#
5#	0	25	50	75	100	0	25	50	75	100	0	25	50	75	100	5#

LOAD CHART - TELESCOPIC BOOM (T)

性能表 - 主臂

Unit: t




	12.9	20.0	27.0	34.1	41.1	17.6	24.7	31.7	38.8	45.8	22.3	29.4	36.4	43.5	50.5	
3.0	100.0	42.0				75.0										3.0
3.5	80.0	42.0				75.0					58.5					3.5
4.0	78.0	42.0				70.0	42.0				58.5					4.0
4.5	74.1	42.0	39.5			69.0	42.0				58.5					4.5
5.0	67.9	42.0	39.5			66.0	42.0				58.5	42.0				5.0
5.5	61.5	42.0	40.0			60.7	42.0	39.0			56.0	42.0				5.5
6.0	56.1	42.0	40.5	28.5		55.3	42.0	39.5			54.8	41.0				6.0
6.5	51.4	42.0	40.8	28.0		50.7	42.0	39.5			50.2	40.0	36.0			6.5
7.0	47.5	42.0	41.0	27.0		46.7	42.0	39.5	28.0		46.2	40.0	36.0			7.0
7.5	44.0	42.0	41.2	26.0	19.0	43.2	41.5	39.5	27.5		42.8	40.0	36.0			7.5
8.0	40.9	42.0	41.5	25.6	19.0	40.2	41.0	39.0	27.0		39.7	40.0	36.0	28.0		8.0
9.0	35.8	37.0	37.5	24.1	19.0	35.1	36.2	36.0	26.0	19.0	34.6	35.7	33.5	27.0		9.0
10.0		32.9	33.4	22.3	18.5	30.1	32.1	32.7	24.0	18.5	29.4	31.2	31.0	25.5	16.5	10.0
11.0		28.0	28.9	21.5	17.5	24.9	26.8	27.8	23.0	17.8	24.3	26.0	27.0	24.5	16.5	11.0
12.0		23.9	24.8	21.0	16.5	21.0	22.8	23.8	22.0	17.0	20.4	22.0	23.0	23.0	16.5	12.0
14.0		18.2	19.0	19.0	15.5		17.1	18.0	18.6	15.8	14.9	16.4	17.3	17.9	15.5	14.0
16.0		14.3	15.0	15.5	14.5		13.3	14.1	14.7	14.8	11.1	12.6	13.5	14.0	14.5	16.0
18.0			12.2	12.6	12.9		10.5	11.3	11.8	12.2	8.3	9.8	10.7	11.2	11.6	18.0
20.0			10.0	10.4	10.7		8.3	9.1	9.6	10.0		7.6	8.5	9.0	9.4	20.0
22.0			8.3	8.7	8.9			7.4	7.9	8.3		6.0	6.8	7.3	7.7	22.0
24.0				7.3	7.5			6.1	6.6	6.9		4.6	5.5	6.0	6.4	24.0
26.0				6.2	6.4			5.0	5.5	5.8			4.4	4.9	5.3	26.0
28.0				5.2	5.5				4.5	4.8			3.4	4.0	4.3	28.0
30.0					4.7				3.7	4.1			2.7	3.2	3.5	30.0
32.0					4.0				3.1	3.4				2.5	2.9	32.0
34.0					3.4					2.8				1.9	2.3	34.0
36.0										2.3				1.4	1.8	36.0
38.0										1.8					1.3	38.0
40.0															0.9	40.0
42.0																42.0
44.0																44.0
	14	6	6	4	3	10	6	6	4	3	8	6	5	4	3	
2#	0	0	0	0	0	50	50	50	50	50	100	100	100	100	100	2#
3#	0	25	50	75	100	0	25	50	75	100	0	25	50	75	100	3#
4#	0	25	50	75	100	0	25	50	75	100	0	25	50	75	100	4#
5#	0	25	50	75	100	0	25	50	75	100	0	25	50	75	100	5#

LOAD CHART - TELESCOPIC BOOM (T)

性能表 - 主臂

Unit: t



	12.9	20.0	27.0	34.1	41.1	17.6	24.7	31.7	38.8	45.8	22.3	29.4	36.4	43.5	50.5	
3.0	100.0	42.0				75.0										3.0
3.5	80.0	42.0				75.0					58.5					3.5
4.0	78.0	42.0				70.0	42.0				58.5					4.0
4.5	74.1	42.0	39.5			69.0	42.0				58.5					4.5
5.0	66.5	42.0	39.5			65.7	42.0				58.5	42.0				5.0
5.5	60.2	42.0	40.0			59.4	42.0	39.0			56.0	42.0				5.5
6.0	54.9	42.0	40.5	28.5		54.1	42.0	39.5			53.6	41.0				6.0
6.5	50.4	42.0	40.8	28.0		49.6	42.0	39.5			49.1	40.0	36.0			6.5
7.0	46.4	42.0	41.0	27.0		45.7	42.0	39.5	28.0		45.2	40.0	36.0			7.0
7.5	43.0	42.0	41.2	26.0	19.0	42.3	41.5	39.5	27.5		41.8	40.0	36.0			7.5
8.0	40.0	41.2	41.5	25.6	19.0	39.3	40.4	39.0	27.0		38.8	39.9	36.0	28.0		8.0
9.0	34.7	36.2	36.7	24.1	19.0	33.5	35.4	36.0	26.0	19.0	32.7	34.7	33.5	27.0		9.0
10.0		30.2	31.1	22.3	18.5	27.0	28.9	30.0	24.0	18.5	26.3	28.1	29.2	25.5	16.5	10.0
11.0		25.3	26.2	21.5	17.5	22.2	24.1	25.1	23.0	17.8	21.6	23.3	24.3	24.5	16.5	11.0
12.0		21.6	22.4	21.0	16.5	18.6	20.4	21.4	22.0	17.0	18.0	19.7	20.6	21.3	16.5	12.0
14.0		16.3	17.1	17.5	15.5		15.2	16.1	16.7	15.8	12.9	14.5	15.4	16.0	15.5	14.0
16.0		12.6	13.4	13.8	14.1		11.5	12.4	13.0	13.4	9.3	10.8	11.7	12.3	12.8	16.0
18.0			10.7	11.1	11.4		8.9	9.8	10.3	10.7	6.7	8.2	9.1	9.7	10.1	18.0
20.0			8.6	9.1	9.3		6.9	7.8	8.3	8.6		6.3	7.1	7.7	8.1	20.0
22.0			7.1	7.5	7.7			6.2	6.7	7.1		4.8	5.6	6.1	6.5	22.0
24.0				6.2	6.5			5.0	5.5	5.8		3.5	4.4	4.9	5.3	24.0
26.0				5.2	5.4			4.0	4.5	4.8			3.4	3.9	4.3	26.0
28.0				4.3	4.6				3.6	3.9			2.5	3.1	3.4	28.0
30.0					3.8				2.9	3.2			1.8	2.3	2.7	30.0
32.0					3.2				2.3	2.6				1.7	2.1	32.0
34.0					2.7					2.1				1.2	1.6	34.0
36.0										1.6				0.8	1.1	36.0
38.0										1.2						38.0
40.0																40.0
42.0																42.0
44.0																44.0
	14	6	6	4	3	10	6	6	4	3	8	6	5	4	3	
2#	0	0	0	0	0	50	50	50	50	50	100	100	100	100	100	2#
3#	0	25	50	75	100	0	25	50	75	100	0	25	50	75	100	3#
4#	0	25	50	75	100	0	25	50	75	100	0	25	50	75	100	4#
5#	0	25	50	75	100	0	25	50	75	100	0	25	50	75	100	5#

LOAD CHART - TELESCOPIC BOOM (T)

性能表 - 主臂

Unit: t








	12.9	20.0	27.0	34.1	41.1	17.6	24.7	31.7	38.8	45.8	22.3	29.4	36.4	43.5	50.5	
3.0	100.0	42.0				75.0										3.0
3.5	80.0	42.0				75.0					58.5					3.5
4.0	78.0	42.0				70.0	42.0				58.5					4.0
4.5	72.3	42.0	39.5			69.0	42.0				58.5					4.5
5.0	64.8	42.0	39.5			64.0	42.0				58.5	42.0				5.0
5.5	58.6	42.0	40.0			57.8	42.0	39.0			56.0	42.0				5.5
6.0	53.4	42.0	40.5	28.5		52.6	42.0	39.5			52.2	41.0				6.0
6.5	49.0	42.0	40.8	28.0		48.2	42.0	39.5			47.7	40.0	36.0			6.5
7.0	45.2	42.0	41.0	27.0		44.4	42.0	39.5	28.0		43.9	40.0	36.0			7.0
7.5	41.8	42.0	41.2	26.0	19.0	41.1	41.5	39.5	27.5		40.6	40.0	36.0			7.5
8.0	38.9	40.1	40.7	25.6	19.0	38.2	39.3	39.0	27.0		37.7	38.8	36.0	28.0		8.0
9.0	31.8	34.0	35.0	24.1	19.0	30.6	32.7	33.8	26.0	19.0	29.8	31.8	33.0	27.0		9.0
10.0		27.8	28.7	22.3	18.5	24.6	26.5	27.6	24.0	18.5	23.9	25.7	26.8	25.5	16.5	10.0
11.0		23.2	24.1	21.5	17.5	20.2	22.0	23.0	23.0	17.8	19.5	21.2	22.2	22.9	16.5	11.0
12.0		19.7	20.6	21.0	16.5	16.8	18.6	19.6	20.2	17.0	16.2	17.8	18.8	19.5	16.5	12.0
14.0		14.7	15.5	16.0	15.5		13.6	14.5	15.1	15.5	11.2	12.8	13.8	14.4	14.9	14.0
16.0		11.2	12.0	12.4	12.7		10.2	11.1	11.6	12.0	7.9	9.5	10.4	11.0	11.4	16.0
18.0			9.5	9.9	10.2		7.7	8.6	9.1	9.5	5.6	7.1	7.9	8.5	8.9	18.0
20.0			7.6	8.0	8.3		5.9	6.7	7.3	7.6		5.3	6.1	6.7	7.1	20.0
22.0			6.1	6.6	6.8			5.3	5.8	6.2		3.9	4.7	5.2	5.6	22.0
24.0				5.4	5.6			4.2	4.7	5.0		2.7	3.6	4.1	4.5	24.0
26.0				4.4	4.7			3.2	3.7	4.0			2.6	3.2	3.5	26.0
28.0				3.6	3.9				2.9	3.3			1.9	2.4	2.7	28.0
30.0					3.2				2.3	2.6			1.2	1.7	2.1	30.0
32.0					2.6				1.7	2.0				1.2	1.5	32.0
34.0					2.1					1.5					1.0	34.0
36.0										1.1						36.0
38.0																38.0
40.0																40.0
42.0																42.0
44.0																44.0
	14	6	6	4	3	10	6	6	4	3	8	6	5	4	3	
2#	0	0	0	0	0	50	50	50	50	50	100	100	100	100	100	2#
3#	0	25	50	75	100	0	25	50	75	100	0	25	50	75	100	3#
4#	0	25	50	75	100	0	25	50	75	100	0	25	50	75	100	4#
5#	0	25	50	75	100	0	25	50	75	100	0	25	50	75	100	5#

LOAD CHART - TELESCOPIC BOOM (T)

性能表 - 主臂


Unit: t



	12.9	20.0	27.0	34.1	41.1	17.6	24.7	31.7	38.8	45.8	22.3	29.4	36.4	43.5	50.5	
3.0	100	42				75										3.0
3.5	80	42				75					58.5					3.5
4.0	78	42				70	42				58.5					4.0
4.5	71.1	42	39.5			69	42				58.5					4.5
5.0	63.7	42	39.5			62.9	42				58.5	42				5.0
5.5	57.7	42	40			56.8	42	39			56	42				5.5
6.0	52.5	42	40.5	28.5		51.7	42	39.5			51.3	41				6.0
6.5	48.2	42	40.8	28		47.4	42	39.5			46.9	40	36			6.5
7.0	44.4	42	41	27		43.6	42	39.5	28		43.2	40	36			7.0
7.5	39.7	42	41.2	26	19	38.4	40.6	39.5	27.5		37.6	39.6	36			7.5
8.0	34.4	36.6	37.6	25.6	19	33.1	35.3	36.4	27		32.4	34.3	35.5	28		8.0
9.0	26.7	28.7	29.6	24.1	19	25.6	27.5	28.6	26	19	24.9	26.7	27.8	27		9.0
10.0		23.4	24.2	22.3	18.5	20.4	22.2	23.2	23.8	18.5	19.8	21.5	22.4	23.1	16.5	10.0
11.0		19.4	20.2	20.7	17.5	16.7	18.4	19.3	19.8	17.8	16.1	17.6	18.6	19.2	16.5	11.0
12.0		16.5	17.2	17.6	16.5	13.6	15.4	16.3	16.8	17	13.1	14.6	15.6	16.2	16.5	12.0
14.0		12	12.7	13.2	13.4		11	11.8	12.4	12.7	8.8	10.3	11.2	11.8	12.2	14.0
16.0		9	9.7	10.1	10.4		8.1	8.9	9.4	9.7	6	7.4	8.3	8.8	9.2	16.0
18.0			7.6	8	8.2		6	6.8	7.3	7.6	4	5.4	6.2	6.7	7.1	18.0
20.0			6	6.4	6.6		4.4	5.2	5.7	6		3.9	4.6	5.1	5.5	20.0
22.0			4.7	5.1	5.4			4	4.4	4.8		2.7	3.4	3.9	4.3	22.0
24.0				4.1	4.3			3	3.5	3.8		1.7	2.5	2.9	3.3	24.0
26.0					3.5			2.2	2.7	3			1.7	2.1	2.5	26.0
28.0					2.8				2	2.3			1	1.5	1.8	28.0
30.0					2.3				1.4	1.7				0.9	1.2	30.0
32.0					1.8				0.9	1.2					0.8	32.0
34.0					1.4					0.8						34.0
36.0																36.0
38.0																38.0
40.0																40.0
42.0																42.0
44.0																44.0
	14	6	6	4	3	10	6	6	4	3	8	6	5	4	3	
2#	0	0	0	0	0	50	50	50	50	50	100	100	100	100	100	2#
3#	0	25	50	75	100	0	25	50	75	100	0	25	50	75	100	3#
4#	0	25	50	75	100	0	25	50	75	100	0	25	50	75	100	4#
5#	0	25	50	75	100	0	25	50	75	100	0	25	50	75	100	5#

OPERATING RANGE - TELESCOPIC BOOM + BOOM EXTENSION + FIXED JIB (TEJ)

起升高度曲线 - 主臂延伸节 + 副臂

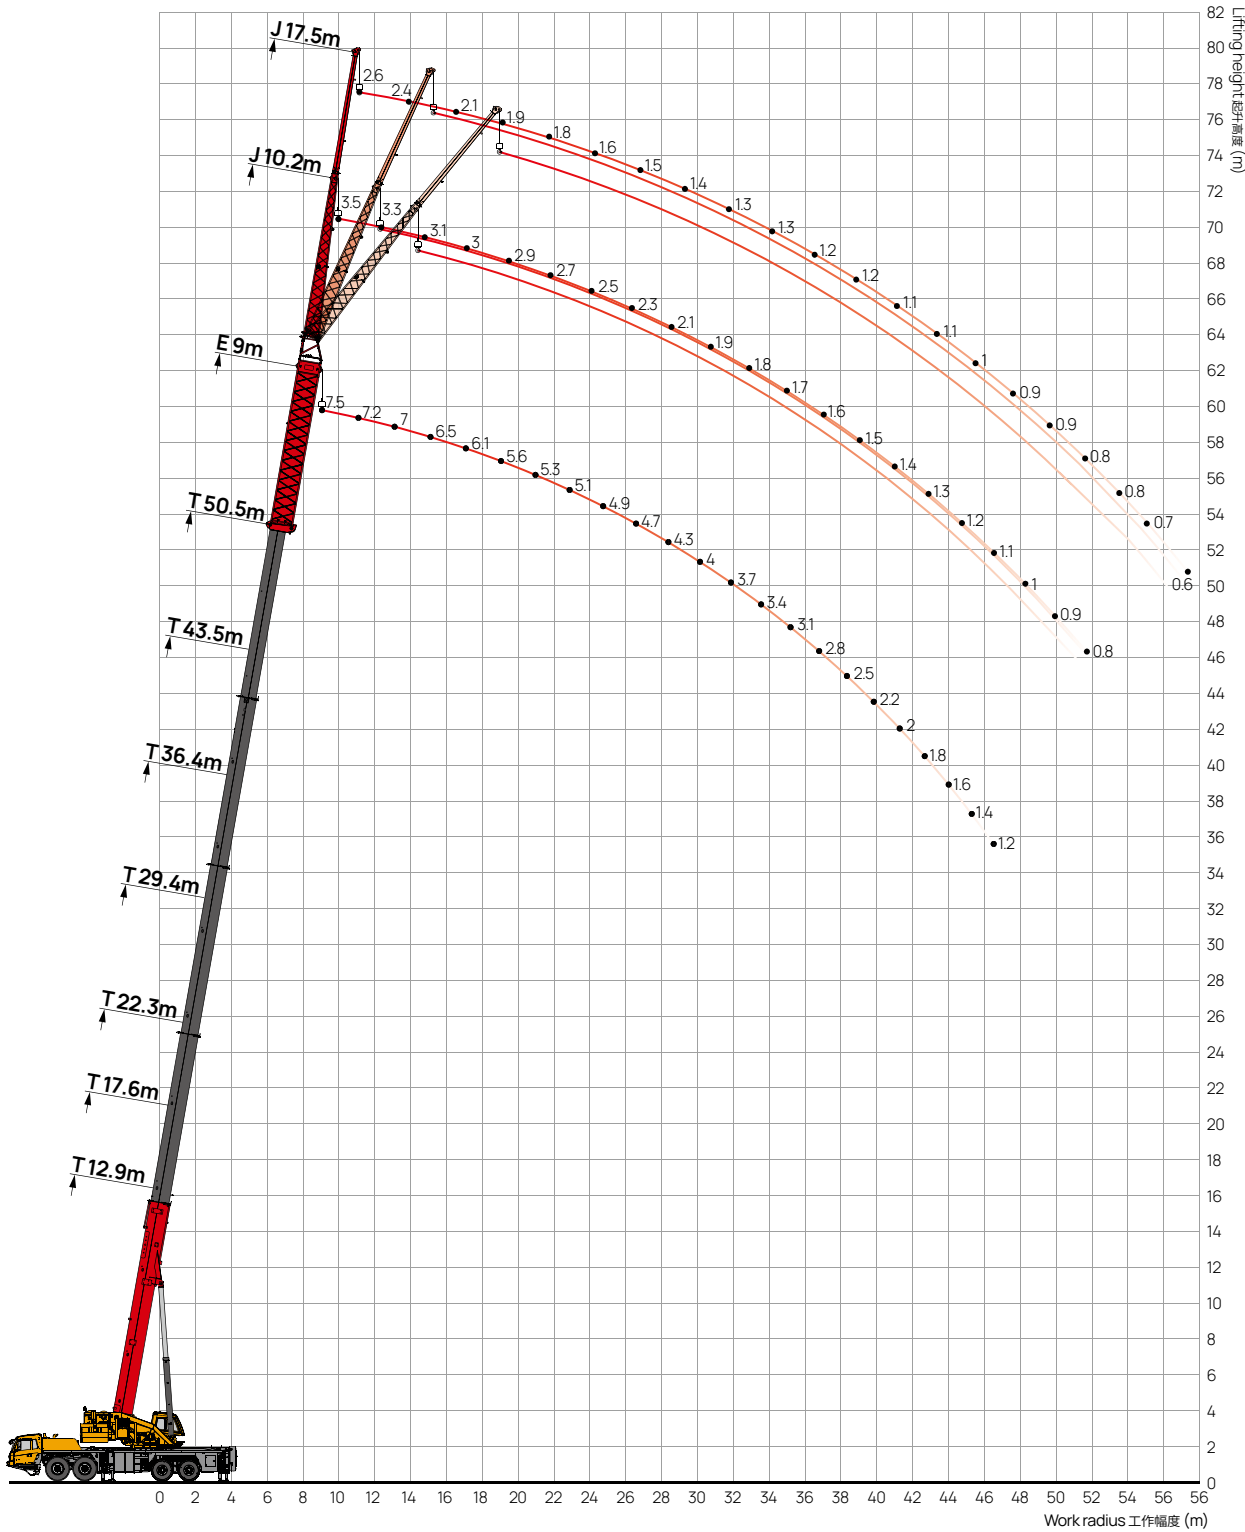

LOAD CHART - TELESCOPIC BOOM + BOOM EXTENSION + FIXED JIB (TEJ)

性能表 - 主臂延伸节 + 副臂



Unit: t

	10.2m			17.5m			9m	19.7			27.0			
	0°	15°	30°	0°	15°	30°	0°	0°	15°	30°	0°	15°	30°	
80.0	6.5	5.0	3.6	3.5	2.5	1.8	7.5	3.5	2.8	2.2	2.6	1.6	1.4	80.0
78.0	6.5	5.0	3.5	3.4	2.4	1.7	7.2	3.3	2.6	2.1	2.4	1.5	1.3	78.0
76.0	6.2	4.8	3.4	3.3	2.3	1.7	7.0	3.1	2.5	2.0	2.1	1.4	1.2	76.0
74.0	5.5	4.5	3.3	3.2	2.2	1.6	6.5	3.0	2.4	1.9	1.9	1.3	1.1	74.0
72.0	5.0	4.2	3.2	2.9	2.1	1.6	6.1	2.9	2.3	1.9	1.8	1.2	1.1	72.0
70.0	4.8	4.0	3.1	2.8	2.0	1.6	5.6	2.7	2.2	1.8	1.6	1.2	1.1	70.0
68.0	4.5	3.8	3.0	2.7	1.9	1.5	5.3	2.5	2.0	1.7	1.5	1.2	1.0	68.0
66.0	4.2	3.6	2.9	2.5	1.9	1.5	5.1	2.3	1.9	1.6	1.4	1.1	1.0	66.0
64.0	3.9	3.4	2.8	2.4	1.8	1.5	4.9	2.1	1.8	1.6	1.3	1.1	1.0	64.0
62.0	3.6	3.2	2.7	2.3	1.7	1.4	4.7	1.9	1.7	1.5	1.3	1.1	0.9	62.0
60.0	3.3	3.0	2.6	2.1	1.7	1.4	4.3	1.8	1.6	1.4	1.2	1.0	0.9	60.0
58.0	3.1	2.8	2.5	2.0	1.6	1.4	4.0	1.7	1.5	1.3	1.2	1.0	0.9	58.0
56.0	2.9	2.6	2.3	1.9	1.6	1.3	3.7	1.6	1.4	1.2	1.1	1.0	0.8	56.0
54.0	2.7	2.4	2.2	1.8	1.5	1.2	3.4	1.5	1.3	1.1	1.1	0.9	0.8	54.0
52.0	2.4	2.2	2.0	1.7	1.4	1.2	3.1	1.4	1.2	1.1	1.0	0.9	0.7	52.0
50.0	2.2	1.9	1.8	1.6	1.3	1.1	2.8	1.3	1.1	1.0	0.9	0.9	0.7	50.0
48.0	2.0	1.8	1.6	1.5	1.2	1.1	2.5	1.2	1.1	1.0	0.9	0.8	0.7	48.0
46.0	1.8	1.6	1.5	1.4	1.2	1.1	2.2	1.1	1.0	0.9	0.8	0.7	0.7	46.0
44.0	1.6	1.5	1.4	1.3	1.1	1.0	2.0	1.0	0.9	0.9	0.8	0.7	0.6	44.0
42.0	1.5	1.4	1.3	1.2	1.1	1.0	1.8	0.9	0.8	0.8	0.7	0.6	0.6	42.0
40.0	1.4	1.3	1.2	1.1	1.0	0.9	1.6	0.8	0.7	0.7	0.6	0.5	0.5	40.0
38.0	1.2	1.1	1.1	1.0	0.9	0.9	1.4							38.0
36.0	1.1	1.0	1.0	0.9	0.8	0.8	1.2							36.0
	1	1	1	1	1	1	1	1	1	1	1	1	1	
2#	100	100	100	100	100	100	100	100	100	100	100	100	100	2#
3#	100	100	100	100	100	100	100	100	100	100	100	100	100	3#
4#	100	100	100	100	100	100	100	100	100	100	100	100	100	4#
5#	100	100	100	100	100	100	100	100	100	100	100	100	100	5#

LOAD CHART - TELESCOPIC BOOM + BOOM EXTENSION + FIXED JIB (TEJ)

性能表 - 主臂延伸节 + 副臂

Unit: t



	10.2m			17.5m			9m	19.7			27.0			
	0°	15°	30°	0°	15°	30°	0°	0°	15°	30°	0°	15°	30°	
80.0	6.5	5.0	3.6	3.5	2.5	1.8	7.5	3.5	2.8	2.2	2.6	1.6	1.4	80.0
78.0	6.5	5.0	3.5	3.4	2.4	1.7	7.2	3.3	2.6	2.1	2.4	1.5	1.3	78.0
76.0	6.2	4.8	3.4	3.3	2.3	1.7	7.0	3.1	2.5	2.0	2.1	1.4	1.2	76.0
74.0	5.5	4.5	3.3	3.2	2.2	1.6	6.5	3.0	2.4	1.9	1.9	1.3	1.1	74.0
72.0	5.0	4.2	3.2	2.9	2.1	1.6	6.1	2.9	2.3	1.9	1.8	1.2	1.1	72.0
70.0	4.8	4.0	3.1	2.8	2.0	1.6	5.6	2.7	2.2	1.8	1.6	1.2	1.1	70.0
68.0	4.5	3.8	3.0	2.7	1.9	1.5	5.3	2.5	2.0	1.7	1.5	1.2	1.0	68.0
66.0	4.2	3.6	2.9	2.5	1.9	1.5	5.1	2.3	1.9	1.6	1.4	1.1	1.0	66.0
64.0	3.9	3.4	2.8	2.4	1.8	1.5	4.9	2.1	1.8	1.6	1.3	1.1	1.0	64.0
62.0	3.6	3.2	2.7	2.3	1.7	1.4	4.7	1.9	1.7	1.5	1.3	1.1	0.9	62.0
60.0	3.3	3.0	2.6	2.1	1.7	1.4	4.3	1.8	1.6	1.4	1.2	1.0	0.9	60.0
58.0	3.1	2.8	2.5	2.0	1.6	1.4	4.0	1.7	1.5	1.3	1.2	1.0	0.9	58.0
56.0	2.9	2.6	2.3	1.9	1.6	1.3	3.7	1.6	1.4	1.2	1.1	1.0	0.8	56.0
54.0	2.7	2.4	2.2	1.8	1.5	1.2	3.4	1.5	1.3	1.1	1.1	0.9	0.8	54.0
52.0	2.4	2.2	2.0	1.7	1.4	1.2	3.1	1.4	1.2	1.1	1.0	0.9	0.7	52.0
50.0	2.2	1.9	1.8	1.6	1.3	1.1	2.8	1.3	1.1	1.0	0.9	0.9	0.7	50.0
48.0	2.0	1.8	1.6	1.5	1.2	1.1	2.5	1.2	1.1	1.0	0.9	0.8	0.7	48.0
46.0	1.8	1.6	1.5	1.4	1.2	1.1	2.2	1.1	1.0	0.9	0.8	0.7	0.7	46.0
44.0	1.6	1.5	1.4	1.3	1.1	1.0	2.0	1.0	0.9	0.9	0.8	0.7	0.6	44.0
42.0	1.5	1.4	1.3	1.2	1.1	1.0	1.7	0.9	0.8	0.8	0.7	0.6	0.6	42.0
40.0	1.4	1.3	1.2	1.1	1.0	0.9	1.5	0.6	0.6	0.6	0.6	0.5	0.5	40.0
38.0	1.2	1.1	1.1	0.9	0.8	0.8	1.3							38.0
36.0	1.0	1.0	0.9	0.7	0.7	0.6	1.1							36.0
	1	1	1	1	1	1	1	1	1	1	1	1	1	
2#	100	100	100	100	100	100	100	100	100	100	100	100	100	2#
3#	100	100	100	100	100	100	100	100	100	100	100	100	100	3#
4#	100	100	100	100	100	100	100	100	100	100	100	100	100	4#
5#	100	100	100	100	100	100	100	100	100	100	100	100	100	5#

LOAD CHART - TELESCOPIC BOOM + BOOM EXTENSION + FIXED JIB (TEJ)

性能表 - 主臂延伸节 + 副臂

Unit: t




	10.2m			17.5m			9m	19.7			27.0			
	0°	15°	30°	0°	15°	30°	0°	0°	15°	30°	0°	15°	30°	
80.0	6.5	5.0	3.6	3.5	2.5	1.8	7.5	3.5	2.8	2.2	2.6	1.6	1.4	80.0
78.0	6.5	5.0	3.5	3.4	2.4	1.7	7.2	3.3	2.6	2.1	2.4	1.5	1.3	78.0
76.0	6.2	4.8	3.4	3.3	2.3	1.7	7.0	3.1	2.5	2.0	2.1	1.4	1.2	76.0
74.0	5.5	4.5	3.3	3.2	2.2	1.6	6.5	3.0	2.4	1.9	1.9	1.3	1.1	74.0
72.0	5.0	4.2	3.2	2.9	2.1	1.6	6.1	2.9	2.3	1.9	1.8	1.2	1.1	72.0
70.0	4.8	4.0	3.1	2.8	2.0	1.6	5.6	2.7	2.2	1.8	1.6	1.2	1.1	70.0
68.0	4.5	3.8	3.0	2.7	1.9	1.5	5.3	2.5	2.0	1.7	1.5	1.2	1.0	68.0
66.0	4.2	3.6	2.9	2.5	1.9	1.5	5.1	2.3	1.9	1.6	1.4	1.1	1.0	66.0
64.0	3.9	3.4	2.8	2.4	1.8	1.5	4.9	2.1	1.8	1.6	1.3	1.1	1.0	64.0
62.0	3.6	3.2	2.7	2.3	1.7	1.4	4.7	1.9	1.7	1.5	1.3	1.1	0.9	62.0
60.0	3.3	3.0	2.6	2.1	1.7	1.4	4.3	1.8	1.6	1.4	1.2	1.0	0.9	60.0
58.0	3.1	2.8	2.5	2.0	1.6	1.4	4.0	1.7	1.5	1.3	1.2	1.0	0.9	58.0
56.0	2.9	2.6	2.3	1.9	1.6	1.3	3.7	1.6	1.4	1.2	1.1	1.0	0.8	56.0
54.0	2.7	2.4	2.2	1.8	1.5	1.2	3.4	1.5	1.3	1.1	1.1	0.9	0.8	54.0
52.0	2.4	2.2	2.0	1.7	1.4	1.2	3.1	1.4	1.2	1.1	1.0	0.9	0.7	52.0
50.0	2.2	1.9	1.8	1.6	1.3	1.1	2.8	1.3	1.1	1.0	0.9	0.9	0.7	50.0
48.0	2.0	1.8	1.6	1.5	1.2	1.1	2.5	1.2	1.1	1.0	0.9	0.8	0.7	48.0
46.0	1.8	1.6	1.5	1.4	1.2	1.1	2.1	1.1	1.0	0.9	0.8	0.7	0.7	46.0
44.0	1.6	1.5	1.4	1.3	1.1	1.0	1.8	0.9	0.9	0.9	0.8	0.7	0.6	44.0
42.0	1.5	1.4	1.3	1.1	1.0	0.9	1.5	0.7	0.7	0.7	0.7	0.6	0.6	42.0
40.0	1.2	1.2	1.1	0.9	0.8	0.8	1.3	0.5	0.5					40.0
38.0	1.0	1.0	0.9	0.7	0.6	0.6	1.1							38.0
36.0	0.8	0.8	0.8	0.6	0.5	0.5	0.9							36.0
	1	1	1	1	1	1	1	1	1	1	1	1	1	
2#	100	100	100	100	100	100	100	100	100	100	100	100	100	2#
3#	100	100	100	100	100	100	100	100	100	100	100	100	100	3#
4#	100	100	100	100	100	100	100	100	100	100	100	100	100	4#
5#	100	100	100	100	100	100	100	100	100	100	100	100	100	5#

LOAD CHART - TELESCOPIC BOOM + BOOM EXTENSION + FIXED JIB (TEJ)

性能表 - 主臂延伸节 + 副臂

Unit: t



	10.2m			17.5m			9m	19.7			27.0			
	0°	15°	30°	0°	15°	30°	0°	0°	15°	30°	0°	15°	30°	
80.0	6.5	5.0	3.6	3.5	2.5	1.8	7.5	3.5	2.8	2.2	2.6	1.6	1.4	80.0
78.0	6.5	5.0	3.5	3.4	2.4	1.7	7.2	3.3	2.6	2.1	2.4	1.5	1.3	78.0
76.0	6.2	4.8	3.4	3.3	2.3	1.7	7.0	3.1	2.5	2.0	2.1	1.4	1.2	76.0
74.0	5.5	4.5	3.3	3.2	2.2	1.6	6.5	3.0	2.4	1.9	1.9	1.3	1.1	74.0
72.0	5.0	4.2	3.2	2.9	2.1	1.6	6.1	2.9	2.3	1.9	1.8	1.2	1.1	72.0
70.0	4.8	4.0	3.1	2.8	2.0	1.6	5.6	2.7	2.2	1.8	1.6	1.2	1.1	70.0
68.0	4.5	3.8	3.0	2.7	1.9	1.5	5.3	2.5	2.0	1.7	1.5	1.2	1.0	68.0
66.0	4.2	3.6	2.9	2.5	1.9	1.5	5.1	2.3	1.9	1.6	1.4	1.1	1.0	66.0
64.0	3.9	3.4	2.8	2.4	1.8	1.5	4.9	2.1	1.8	1.6	1.3	1.1	1.0	64.0
62.0	3.6	3.2	2.7	2.3	1.7	1.4	4.7	1.9	1.7	1.5	1.3	1.1	0.9	62.0
60.0	3.3	3.0	2.6	2.1	1.7	1.4	4.3	1.8	1.6	1.4	1.2	1.0	0.9	60.0
58.0	3.1	2.8	2.5	2.0	1.6	1.4	4.0	1.7	1.5	1.3	1.2	1.0	0.9	58.0
56.0	2.9	2.6	2.3	1.9	1.6	1.3	3.7	1.6	1.4	1.2	1.1	1.0	0.8	56.0
54.0	2.7	2.4	2.2	1.8	1.5	1.2	3.2	1.5	1.3	1.1	1.1	0.9	0.8	54.0
52.0	2.4	2.2	2.0	1.7	1.4	1.2	2.7	1.4	1.2	1.1	1.0	0.9	0.7	52.0
50.0	2.2	1.9	1.8	1.6	1.3	1.1	2.3	1.3	1.1	1.0	0.9	0.9	0.7	50.0
48.0	1.9	1.7	1.6	1.5	1.2	1.1	2.0	1.1	1.1	1.0	0.9	0.8	0.7	48.0
46.0	1.6	1.4	1.4	1.2	1.0	0.9	1.6	0.8	0.8	0.7	0.7	0.7	0.7	46.0
44.0	1.3	1.2	1.1	1.0	0.8	0.7	1.3	0.5	0.5	0.5	0.5	0.5	0.5	44.0
42.0	1.0	0.9	0.9	0.7	0.6	0.6	1.1							42.0
40.0	0.8	0.7	0.7	0.5	0.5		0.9							40.0
38.0	0.6	0.6	0.5				0.7							38.0
36.0							0.5							36.0
	1	1	1	1	1	1	1	1	1	1	1	1	1	
2#	100	100	100	100	100	100	100	100	100	100	100	100	100	2#
3#	100	100	100	100	100	100	100	100	100	100	100	100	100	3#
4#	100	100	100	100	100	100	100	100	100	100	100	100	100	4#
5#	100	100	100	100	100	100	100	100	100	100	100	100	100	5#

LOAD CHART - TELESCOPIC BOOM + BOOM EXTENSION + FIXED JIB (TEJ)

性能表 - 主臂延伸节 + 副臂

Unit: t




	10.2m			17.5m			9m	19.7			27.0			
	0°	15°	30°	0°	15°	30°	0°	0°	15°	30°	0°	15°	30°	
80.0	6.5	5.0	3.6	3.5	2.5	1.8	7.5	3.5	2.8	2.2	2.6	1.6	1.4	80.0
78.0	6.5	5.0	3.5	3.4	2.4	1.7	7.2	3.3	2.6	2.1	2.4	1.5	1.3	78.0
76.0	6.2	4.8	3.4	3.3	2.3	1.7	7.0	3.1	2.5	2.0	2.1	1.4	1.2	76.0
74.0	5.5	4.5	3.3	3.2	2.2	1.6	6.5	3.0	2.4	1.9	1.9	1.3	1.1	74.0
72.0	5.0	4.2	3.2	2.9	2.1	1.6	6.1	2.9	2.3	1.9	1.8	1.2	1.1	72.0
70.0	4.8	4.0	3.1	2.8	2.0	1.6	5.6	2.7	2.2	1.8	1.6	1.2	1.1	70.0
68.0	4.5	3.8	3.0	2.7	1.9	1.5	5.3	2.5	2.0	1.7	1.5	1.2	1.0	68.0
66.0	4.2	3.6	2.9	2.5	1.9	1.5	5.1	2.3	1.9	1.6	1.4	1.1	1.0	66.0
64.0	3.9	3.4	2.8	2.4	1.8	1.5	4.9	2.1	1.8	1.6	1.3	1.1	1.0	64.0
62.0	3.6	3.2	2.7	2.3	1.7	1.4	4.7	1.9	1.7	1.5	1.3	1.1	0.9	62.0
60.0	3.3	3.0	2.6	2.1	1.7	1.4	4.3	1.8	1.6	1.4	1.2	1.0	0.9	60.0
58.0	3.1	2.8	2.5	2.0	1.6	1.4	3.9	1.7	1.5	1.3	1.2	1.0	0.9	58.0
56.0	2.9	2.6	2.3	1.9	1.6	1.3	3.3	1.6	1.4	1.2	1.1	1.0	0.8	56.0
54.0	2.7	2.4	2.2	1.8	1.5	1.2	2.7	1.5	1.3	1.1	1.1	0.9	0.8	54.0
52.0	2.2	2.0	1.9	1.7	1.4	1.2	2.3	1.4	1.2	1.1	1.0	0.9	0.7	52.0
50.0	1.8	1.7	1.5	1.4	1.2	1.1	1.9	1.0	1.0	1.0	0.9	0.9	0.7	50.0
48.0	1.5	1.3	1.3	1.1	0.9	0.8	1.5	0.7	0.7	0.7	0.7	0.7	0.6	48.0
46.0	1.2	1.1	1.0	0.9	0.7	0.6	1.2							46.0
44.0	0.9	0.8	0.8	0.6	0.5		1.0							44.0
42.0	0.7	0.6	0.6				0.7							42.0
40.0	0.5						0.5							40.0
38.0														38.0
36.0														36.0
	1			1			1	1			1			
	2#	3#	4#	2#	3#	4#	2#	3#	4#	2#	3#	4#	5#	
2#	100	100	100	100	100	100	100	100	100	100	100	100	100	2#
3#	100	100	100	100	100	100	100	100	100	100	100	100	100	3#
4#	100	100	100	100	100	100	100	100	100	100	100	100	100	4#
5#	100	100	100	100	100	100	100	100	100	100	100	100	100	5#

LOAD CHART - TELESCOPIC BOOM + BOOM EXTENSION + FIXED JIB (TEJ)

性能表 - 主臂延伸节 + 副臂

Unit: t



	10.2m			17.5m			9m	19.7			27.0			
	0°	15°	30°	0°	15°	30°	0°	0°	15°	30°	0°	15°	30°	
80.0	6.5	5.0	3.6	3.5	2.5	1.8	7.5	3.5	2.8	2.2	2.6	1.6	1.4	80.0
78.0	6.5	5.0	3.5	3.4	2.4	1.7	7.2	3.3	2.6	2.1	2.4	1.5	1.3	78.0
76.0	6.2	4.8	3.4	3.3	2.3	1.7	7.0	3.1	2.5	2.0	2.1	1.4	1.2	76.0
74.0	5.5	4.5	3.3	3.2	2.2	1.6	6.5	3.0	2.4	1.9	1.9	1.3	1.1	74.0
72.0	5.0	4.2	3.2	2.9	2.1	1.6	6.1	2.9	2.3	1.9	1.8	1.2	1.1	72.0
70.0	4.8	4.0	3.1	2.8	2.0	1.6	5.6	2.7	2.2	1.8	1.6	1.2	1.1	70.0
68.0	4.5	3.8	3.0	2.7	1.9	1.5	5.3	2.5	2.0	1.7	1.5	1.2	1.0	68.0
66.0	4.2	3.6	2.9	2.5	1.9	1.5	5.1	2.3	1.9	1.6	1.4	1.1	1.0	66.0
64.0	3.9	3.4	2.8	2.4	1.8	1.5	4.9	2.1	1.8	1.6	1.3	1.1	1.0	64.0
62.0	3.6	3.2	2.7	2.3	1.7	1.4	4.7	1.9	1.7	1.5	1.3	1.1	0.9	62.0
60.0	3.3	3.0	2.6	2.1	1.7	1.4	4.3	1.8	1.6	1.4	1.2	1.0	0.9	60.0
58.0	3.1	2.8	2.5	2.0	1.6	1.4	3.7	1.7	1.5	1.3	1.2	1.0	0.9	58.0
56.0	2.9	2.6	2.3	1.9	1.6	1.3	3.1	1.6	1.4	1.2	1.1	1.0	0.8	56.0
54.0	2.5	2.2	2.1	1.8	1.5	1.2	2.6	1.5	1.3	1.1	1.1	0.9	0.8	54.0
52.0	2.0	1.8	1.7	1.6	1.4	1.2	2.1	1.2	1.2	1.1	1.0	0.9	0.7	52.0
50.0	1.7	1.5	1.4	1.3	1.1	1.0	1.7	0.9	0.8	0.8	0.8	0.8	0.7	50.0
48.0	1.3	1.2	1.1	1.0	0.8	0.7	1.4	0.5	0.5	0.5	0.5	0.5	0.5	48.0
46.0	1.0	0.9	0.9	0.7	0.6	0.5	1.1							46.0
44.0	0.8	0.7	0.6	0.5			0.8							44.0
42.0	0.5	0.5					0.6							42.0
40.0														40.0
38.0														38.0
36.0														36.0
	1	1	1	1	1	1	1	1	1	1	1	1	1	
2#	100	100	100	100	100	100	100	100	100	100	100	100	100	2#
3#	100	100	100	100	100	100	100	100	100	100	100	100	100	3#
4#	100	100	100	100	100	100	100	100	100	100	100	100	100	4#
5#	100	100	100	100	100	100	100	100	100	100	100	100	100	5#

LOAD CHART - TELESCOPIC BOOM + BOOM EXTENSION + FIXED JIB (TEJ)

性能表 - 主臂延伸节 + 副臂

Unit: t




	10.2m			17.5m			9m	19.7			27.0			
	0°	15°	30°	0°	15°	30°	0°	0°	15°	30°	0°	15°	30°	
80.0	6.5	5.0	3.6	3.5	2.5	1.8	7.5	3.5	2.8	2.2	2.6	1.6	1.4	80.0
78.0	6.5	5.0	3.5	3.4	2.4	1.7	7.2	3.3	2.6	2.1	2.4	1.5	1.3	78.0
76.0	6.2	4.8	3.4	3.3	2.3	1.7	7.0	3.1	2.5	2.0	2.1	1.4	1.2	76.0
74.0	5.5	4.5	3.3	3.2	2.2	1.6	6.5	3.0	2.4	1.9	1.9	1.3	1.1	74.0
72.0	5.0	4.2	3.2	2.9	2.1	1.6	6.1	2.9	2.3	1.9	1.8	1.2	1.1	72.0
70.0	4.8	4.0	3.1	2.8	2.0	1.6	5.6	2.7	2.2	1.8	1.6	1.2	1.1	70.0
68.0	4.5	3.8	3.0	2.7	1.9	1.5	5.3	2.5	2.0	1.7	1.5	1.2	1.0	68.0
66.0	4.2	3.6	2.9	2.5	1.9	1.5	5.1	2.3	1.9	1.6	1.4	1.1	1.0	66.0
64.0	3.9	3.4	2.8	2.4	1.8	1.5	4.9	2.1	1.8	1.6	1.3	1.1	1.0	64.0
62.0	3.6	3.2	2.7	2.3	1.7	1.4	4.6	1.9	1.7	1.5	1.3	1.1	0.9	62.0
60.0	3.3	3.0	2.6	2.1	1.7	1.4	3.8	1.8	1.6	1.4	1.2	1.0	0.9	60.0
58.0	3.1	2.7	2.5	2.0	1.6	1.4	3.2	1.7	1.5	1.3	1.2	1.0	0.9	58.0
56.0	2.5	2.2	2.1	1.9	1.6	1.3	2.6	1.6	1.4	1.2	1.1	1.0	0.8	56.0
54.0	2.0	1.8	1.7	1.6	1.3	1.2	2.1	1.2	1.2	1.1	1.1	0.9	0.8	54.0
52.0	1.6	1.5	1.3	1.2	1.0	0.9	1.7	0.8	0.8	0.8	0.8	0.8	0.7	52.0
50.0	1.3	1.1	1.0	0.9	0.8	0.7	1.3	0.5	0.5	0.5	0.5	0.5		50.0
48.0	1.0	0.8	0.8	0.7	0.5		1.0							48.0
46.0	0.7	0.6	0.5				0.7							46.0
44.0							0.5							44.0
42.0														42.0
40.0														40.0
38.0														38.0
36.0														36.0
	1	1	1	1	1	1	1	1	1	1	1	1	1	
2#	100	100	100	100	100	100	100	100	100	100	100	100	100	2#
3#	100	100	100	100	100	100	100	100	100	100	100	100	100	3#
4#	100	100	100	100	100	100	100	100	100	100	100	100	100	4#
5#	100	100	100	100	100	100	100	100	100	100	100	100	100	5#

LOAD CHART - TELESCOPIC BOOM + BOOM EXTENSION + FIXED JIB (TEJ)

性能表 - 主臂延伸节 + 副臂

Unit: t



	10.2m			17.5m			9m	19.7			27.0			
	0°	15°	30°	0°	15°	30°	0°	0°	15°	30°	0°	15°	30°	
80.0	6.5	5.0	3.6	3.5	2.5	1.8	7.5	3.5	2.8	2.2	2.6	1.6	1.4	80.0
78.0	6.5	5.0	3.5	3.4	2.4	1.7	7.2	3.3	2.6	2.1	2.4	1.5	1.3	78.0
76.0	6.2	4.8	3.4	3.3	2.3	1.7	7.0	3.1	2.5	2.0	2.1	1.4	1.2	76.0
74.0	5.5	4.5	3.3	3.2	2.2	1.6	6.5	3.0	2.4	1.9	1.9	1.3	1.1	74.0
72.0	5.0	4.2	3.2	2.9	2.1	1.6	6.1	2.9	2.3	1.9	1.8	1.2	1.1	72.0
70.0	4.8	4.0	3.1	2.8	2.0	1.6	5.6	2.7	2.2	1.8	1.6	1.2	1.1	70.0
68.0	4.5	3.8	3.0	2.7	1.9	1.5	5.3	2.5	2.0	1.7	1.5	1.2	1.0	68.0
66.0	4.2	3.6	2.9	2.5	1.9	1.5	5.1	2.3	1.9	1.6	1.4	1.1	1.0	66.0
64.0	3.9	3.4	2.8	2.4	1.8	1.5	4.9	2.1	1.8	1.6	1.3	1.1	1.0	64.0
62.0	3.6	3.2	2.7	2.3	1.7	1.4	4.4	1.9	1.7	1.5	1.3	1.1	0.9	62.0
60.0	3.3	3.0	2.6	2.1	1.7	1.4	3.6	1.8	1.6	1.4	1.2	1.0	0.9	60.0
58.0	2.9	2.5	2.3	2.0	1.6	1.4	3.0	1.7	1.5	1.3	1.2	1.0	0.9	58.0
56.0	2.3	2.1	1.9	1.8	1.5	1.3	2.4	1.5	1.4	1.2	1.1	1.0	0.8	56.0
54.0	1.9	1.7	1.5	1.4	1.2	1.0	1.9	1.0	1.0	1.0	1.0	0.9	0.8	54.0
52.0	1.5	1.3	1.2	1.1	0.9	0.8	1.5	0.7	0.7	0.6	0.6	0.6	0.6	52.0
50.0	1.1	1.0	0.9	0.8	0.6	0.5	1.2							50.0
48.0	0.8	0.7	0.6	0.5			0.8							48.0
46.0	0.5						0.6							46.0
44.0														44.0
42.0														42.0
40.0														40.0
38.0														38.0
36.0														36.0
	10.2m			17.5m			9m	19.7			27.0			
	1	1	1	1	1	1	1	1	1	1	1	1	1	
2#	100	100	100	100	100	100	100	100	100	100	100	100	100	2#
3#	100	100	100	100	100	100	100	100	100	100	100	100	100	3#
4#	100	100	100	100	100	100	100	100	100	100	100	100	100	4#
5#	100	100	100	100	100	100	100	100	100	100	100	100	100	5#

LOAD CHART - TELESCOPIC BOOM + BOOM EXTENSION + FIXED JIB (TEJ)

性能表 - 主臂延伸节 + 副臂

Unit: t




	10.2m			17.5m			9m	19.7			27.0			
	0°	15°	30°	0°	15°	30°	0°	0°	15°	30°	0°	15°	30°	
80.0	6.5	5.0	3.6	3.5	2.5	1.8	7.5	3.5	2.8	2.2	2.6	1.6	1.4	80.0
78.0	6.5	5.0	3.5	3.4	2.4	1.7	7.2	3.3	2.6	2.1	2.4	1.5	1.3	78.0
76.0	6.2	4.8	3.4	3.3	2.3	1.7	7.0	3.1	2.5	2.0	2.1	1.4	1.2	76.0
74.0	5.5	4.5	3.3	3.2	2.2	1.6	6.5	3.0	2.4	1.9	1.9	1.3	1.1	74.0
72.0	5.0	4.2	3.2	2.9	2.1	1.6	6.1	2.9	2.3	1.9	1.8	1.2	1.1	72.0
70.0	4.8	4.0	3.1	2.8	2.0	1.6	5.6	2.7	2.2	1.8	1.6	1.2	1.1	70.0
68.0	4.5	3.8	3.0	2.7	1.9	1.5	5.3	2.5	2.0	1.7	1.5	1.2	1.0	68.0
66.0	4.2	3.6	2.9	2.5	1.9	1.5	5.1	2.3	1.9	1.6	1.4	1.1	1.0	66.0
64.0	3.9	3.4	2.8	2.4	1.8	1.5	4.6	2.1	1.8	1.6	1.3	1.1	1.0	64.0
62.0	3.6	3.2	2.7	2.3	1.7	1.4	3.8	1.9	1.7	1.5	1.3	1.1	0.9	62.0
60.0	2.9	2.6	2.3	2.1	1.7	1.4	3.0	1.8	1.6	1.4	1.2	1.0	0.9	60.0
58.0	2.3	2.0	1.9	1.8	1.5	1.3	2.4	1.5	1.5	1.3	1.2	1.0	0.9	58.0
56.0	1.8	1.6	1.5	1.4	1.1	1.0	1.9	1.0	1.0	1.0	1.0	1.0	0.8	56.0
54.0	1.4	1.2	1.1	1.0	0.8	0.7	1.5	0.6	0.6	0.6	0.6	0.6	0.5	54.0
52.0	1.0	0.9	0.8	0.7	0.5		1.1							52.0
50.0	0.7	0.6	0.5				0.7							50.0
48.0														48.0
46.0														46.0
44.0														44.0
42.0														42.0
40.0														40.0
38.0														38.0
36.0														36.0
	1	1	1	1	1	1	1	1	1	1	1	1	1	
2#	100	100	100	100	100	100	100	100	100	100	100	100	100	2#
3#	100	100	100	100	100	100	100	100	100	100	100	100	100	3#
4#	100	100	100	100	100	100	100	100	100	100	100	100	100	4#
5#	100	100	100	100	100	100	100	100	100	100	100	100	100	5#

LOAD CHART - TELESCOPIC BOOM + BOOM EXTENSION + FIXED JIB (TEJ)


性能表 - 主臂延伸节 + 副臂

Unit: t



	10.2m			17.5m			9m	
	0°	15°	30°	0°	15°	30°	0°	
80.0	6.5	5.0	3.6	3.5	2.5	1.8	7.5	80.0
78.0	6.5	5.0	3.5	3.4	2.4	1.7	7.2	78.0
76.0	6.2	4.8	3.4	3.3	2.3	1.7	7.0	76.0
74.0	5.5	4.5	3.3	3.2	2.2	1.6	6.5	74.0
72.0	5.0	4.2	3.2	2.9	2.1	1.6	6.1	72.0
70.0	4.8	4.0	3.1	2.8	2.0	1.6	5.6	70.0
68.0	4.5	3.8	3.0	2.7	1.9	1.5	5.3	68.0
66.0	4.2	3.6	2.9	2.5	1.9	1.5	4.7	66.0
64.0	3.6	3.1	2.7	2.4	1.8	1.5	3.7	64.0
62.0	2.8	2.4	2.2	2.2	1.7	1.4	2.9	62.0
60.0	2.2	1.9	1.7	1.7	1.3	1.1	2.2	60.0
58.0	1.6	1.4	1.2	1.2	0.9	0.8	1.7	58.0
56.0	1.2	1.0	0.9	0.8	0.6	0.5	1.2	56.0
54.0	0.8	0.6	0.5	0.5			0.8	54.0
52.0							0.5	52.0
	1	1	1	1	1	1	1	
2#	100	100	100	100	100	100	100	2#
3#	100	100	100	100	100	100	100	3#
4#	100	100	100	100	100	100	100	4#
5#	100	100	100	100	100	100	100	5#

Unit: t



	10.2m			17.5m			9m	
	0°	15°	30°	0°	15°	30°	0°	
80.0	6.5	5.0	3.6	3.5	2.5	1.8	7.5	80.0
78.0	6.5	5.0	3.5	3.4	2.4	1.7	7.2	78.0
76.0	6.2	4.8	3.4	3.3	2.3	1.7	7.0	76.0
74.0	5.5	4.5	3.3	3.2	2.2	1.6	6.5	74.0
72.0	5.0	4.2	3.2	2.9	2.1	1.6	6.1	72.0
70.0	4.8	4.0	3.1	2.8	2.0	1.6	5.6	70.0
68.0	4.5	3.8	3.0	2.7	1.9	1.5	5.1	68.0
66.0	3.8	3.2	2.8	2.5	1.9	1.5	3.9	66.0
64.0	2.9	2.5	2.2	2.3	1.8	1.5	3.0	64.0
62.0	2.2	1.9	1.6	1.7	1.3	1.1	2.3	62.0
60.0	1.6	1.3	1.2	1.2	0.9	0.7	1.7	60.0
58.0	1.1	0.9	0.8	0.8	0.5		1.1	58.0
56.0	0.7	0.5					0.7	56.0
	1	1	1	1	1	1	1	
2#	100	100	100	100	100	100	100	2#
3#	100	100	100	100	100	100	100	3#
4#	100	100	100	100	100	100	100	4#
5#	100	100	100	100	100	100	100	5#

ICON DESCRIPTION

图标说明

 Max. lifting capacity 最大起重量	 Max. boom length 最大主臂长	 Max. lifting radius 最大吊载幅度	 Max. lifting height 最大吊载高度	 Driver's cab 驾驶室
 Carrier frame 车架	 Engine 发动机	 Transmission 变速箱	 Transfer case 分动箱	 Axle 车桥
 Outrigger 支腿	 Slewing platform 转台	 Suspension system 悬挂	 Steering 转向	 Tires/Tire size 轮胎/轮胎尺寸
 Wheel formula 轮胎模式	 Transmission shaft 传动轴	 Brake system 制动系统	 Electrical system 电气系统	 Hydraulic system 液压系统
 Operator's cab 操纵室	 Control system 控制系统	 Hoist 起升机构	 Slewing 回转机构	 Safety equipment 安全装置
 Load moment indicator 力矩限制器	 Counterweight 配重	 CW rearward positioned 配重后移	 Boom & telescoping system 主臂	 Luffing system 变幅系统
 Jib 副臂	 Superlift device 超起	 Wind power jib 风电副臂	 Luffing jib 塔臂	 Auxiliary jib 鹅头臂
 Boom extension 主臂延伸臂	 Auxiliary boom nose 臂尖滑轮	 Rear storage box 尾部储物箱	 Optional equipment at extra fees 选配	 Motor 电机
 Power battery 动力电池				
 Axle load 轴荷	 Weight 重量	 Number of sheaves 滑轮数量	 Min. Min. travel speed 最小行驶速度	 Max. Max. travel speed 最大行驶速度
 Max. gradeability 最大爬坡度	 Gear 档位	 Onroad gear 高速档	 Crawl speed 龟速档	 Hook 吊钩
 Main hook 主钩	 Auxiliary hook 副钩	 Rope rate 倍率	 Fmax Max. supporting forces 最大支撑力	 Outrigger pads 支脚盘
 Outrigger jack 垂直支腿	 Outrigger beam 水平支腿	 Front outrigger 前支腿	 Rear outrigger 后支腿	 kg Hook weight 吊钩重量
 Operations 主要动作	 Max. single line lifting speed (empty load) 单绳速度(空载)	 Rope diameter 钢丝绳直径	 L Rope length 钢丝绳长度	 F Max. single line pull 最大单绳拉力
 Main winch 主卷扬	 Auxiliary winch 副卷扬	 Full luffing up/down time of boom 主臂起落幅时间	 Full extension/retraction time of boom 主臂伸缩时间	 m/s Anemometer 风速仪
 Spare tire 备胎				

SANY OVERSEAS SERVICE

三一海外服务

GLOBAL SUPPORT
ANYTIME ANYWHERE
NO MORE WAITING

900+

Overseas service centers
海外服务中心

3500+

Professional technical
service engineers
专业技术服务

365×24

Support
全时服务

Service Center

Tel: +86 4006098318

Mail: CRD@sany.com.cn

WhatsApp: +86 19908478631 (Only WhatsApp)




On-demand professional equipment repair services
available anytime, anywhere, ensuring rapid response and
efficient solutions.

随时一键呼叫专业设备维修服务，快速响应，高效解决。



Download MySANY for a comprehensive,
all-in-one experience!

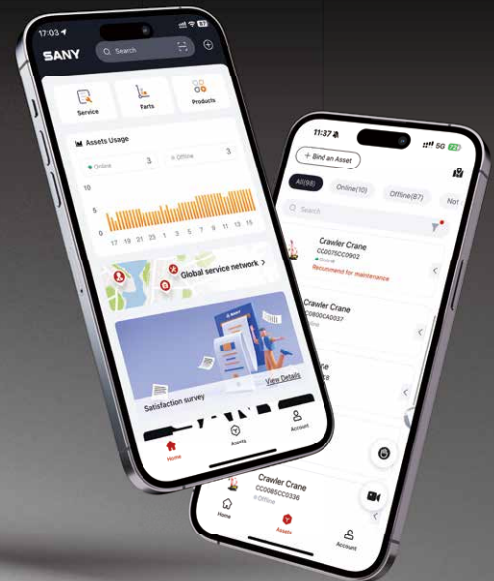



SANY Mobile Crane and Tower Crane Industrial Park

No.168 Jinzhou Avenue, Jinzhou Development Zone, Changsha City, Hunan Province, P.R. China Zip 410600

SANY Crawler Crane Industrial Park

No. 2188 Daishan Road, Wuxing District, Huzhou City, Zhejiang Province, P. R. China Zip 313028

Consulting sanycrane@sanygroup.com (Crane BU) / crd@sany.com.cn (IHQ)

After-sales Service 0086-400 609 8318 (Overseas)

Reminder:

Any change in the technical parameters and configuration due to product modification or upgrade may occur without prior notice. The machine in the picture may include additional equipment. This brochure is for reference only, and goods in kind shall prevail.

Copyright at SANY. No part of this brochure may be copied or used for any purpose without written approval from SANY.

© Version 2025-08-01

三一轮式、塔式起重机产业园：中国湖南长沙金洲开发区金洲大道168号 邮编：410600

三一履带起重机产业园：中国浙江湖州市吴兴区黛山路2188号 邮编：313028

咨询：sanycrane@sanygroup.com(起重事业部) / crd@sany.com.cn(国际总部)

售后服务：0086-400 609 8318(海外)

温馨提示：

由于技术不断更新，技术参数及配置如有更改，恕不另行通知。图中机器可能包括附加设备，本画册仅供参考，以实物为准。

版权为三一所有，未经三一书面许可，本画册任何内容不得被复制用于任何目的。

© 2025年8月01日版



Contact SANY Group

Follow SANY Group

SANY CRANE | [f](#) [in](#) [v](#) | [globe](#) www.sanyglobal.com